

The information contained in Chapter One: Roadway Design Standards, dated May 2022, has been updated to reflect the **May 2025 Errata**. The errata incorporates DES 22-03: “Practical Design: Bridge or Culvert Replacement Projects” (approved by the Nebraska Division of the FHWA on January 18, 2023), incorporates DES 23-02: “3R Standards for Expressways with Access Only at Intersections” (approved by the Nebraska Division of the FHWA on August 11, 2023), addresses errors, changes in procedure, changes in NDOT department titles, changes in other Roadway Design Manual chapters and other reference material citations occurring since the latest publication of this chapter.

Chapter One presents guidance for the design of New, Reconstructed and 3R projects: additional design guidance for 3R projects is provided in Chapter Seventeen.

Chapter One

Roadway Design Standards

1. STATUTORY AUTHORITY

1.A Federal Authority

1.A.1 Projects on the National Highway System

Section 109(c) of Title 23, United States Code (U.S.C.) ([U.S.C. Title 23 - HIGHWAYS](#)) provides that design and construction standards for new construction and reconstruction on the National Highway System (NHS) and for resurfacing, restoring, and rehabilitating multi-lane limited access highways on the National Highway System shall be those approved by the United States Secretary of Transportation in cooperation with the State highway departments. In a similar manner, 23 U.S.C. 109(b) provides standards for the Interstate system.

1.A.2 3R Freeway Projects on the National Highway System

January 3, 2022 amendments to 23 CFR 625 ([Federal Register :: Design Standards for Highways](#)) include the following summary:

“FHWA amends its regulations governing design standards and standard specifications applicable to new construction, reconstruction, resurfacing (except for maintenance resurfacing), restoration, and rehabilitation projects on the National Highway System (NHS). In issuing this final rule, FHWA will allow State departments of transportation (State DOT) to adopt procedures or design criteria, as approved by FHWA, that enable the State to undertake resurfacing, restoration, and rehabilitation (RRR) projects on freeways, including Interstate highways, without utilizing design exceptions as long as the RRR procedures or criteria are met. In addition, FHWA incorporates by reference the latest versions of design standards and standard specifications previously adopted and incorporated by reference and removes from its regulations the corresponding outdated or superseded versions of these standards and specifications.”

1.A.3 Projects not on the National Highway System

Title 23 of the Code of Federal Regulations (23 CFR), Section 625.3(a)(2) ([eCFR :: 23 CFR Part 625 -- Design Standards for Highways](#)) states that “Federal-aid projects not on the NHS are to be designed, constructed, operated, and maintained in accordance with State laws, regulations, directives, safety standards, design standards, and construction standards.”

1.B State Authority – Board of Public Roads Classifications and Standards

1.B.1 Minimum Design Standards

The Nebraska Revised Statutes have authorized the **Board of Public Roads Classifications and Standards (Board)** to develop minimum standards of design, construction, and maintenance for each functional classification set forth in Sections 39-2103 and 39-2104 ([Nebraska Legislature - Revised Statutes Chapter 39](#)). The **Nebraska Department of Transportation (NDOT)** is required to abide by these standards. If it is not practicable to meet the minimum design standards, a relaxation of the Nebraska Minimum Design Standards must be requested (See Section 11 of this chapter).

1.B.2 Flexibility in the Design and Maintenance Standards

March 2019 amendments to the Nebraska Revised Statutes, Section 39-2113 (<https://nebraskalegislature.gov/laws/statutes.php?statute=39-2113>) include the following:

(7) In cooperation with the Department of Transportation, counties, and municipalities, the board is authorized to develop, support, approve, and implement programs and project strategies that provide additional flexibility in the design and maintenance standards. Once a program is established, the board shall allow project preapproval for all projects that conform to the agreed-upon program. The programs shall be set out in memorandums of understanding or guidance documents and may include, but are not limited to, the following:

- a) Practical design, flexible design, or similar programs or strategies intended to focus funding on the primary problem or need in constructing projects that will not meet all the standards but provide substantial overall benefit at a reasonable cost to the public;
- b) Asset preservation or preventative maintenance programs and strategies that focus on extending the life of assets, such as, but not limited to, pavement and bridges that may incorporate benefit cost, cost effectiveness, best value, or lifecycle analysis in determining the project approach and overall benefit to the public; and
- c) Context sensitive design programs or similar programs that consider the established needs and values of a county, municipality, community, or other connected group to enable projects that balance safety while making needed improvements in a manner that fits the surroundings and provides overall benefit to the public.

1.B.3 Practical Design

Policy DES 22-03, January 2023, provides flexibility in the application of Nebraska's highway design standards, in accordance with a Memorandum of Understanding between **NDOT** and the **Board**, executed on October 26, 2022 ([ndot-program.pdf](#)). For additional information see Chapter Seventeen: Resurfacing, Restoration and Rehabilitation (3R) Projects, Section 1.H, of this manual and the **FHWA** web page "Performance-Based Practical Design" ([Performance-Based Practical Design - Design - Federal Highway Administration](#)).

1.B.4 3R Standards for Expressways with Access Only at Interchanges

In response to the January 3, 2022, amendments to 23 CFR 625 (see Section 1.A.1 of this chapter), and in accordance with a Memorandum of Understanding between **NDOT** and the **Board**, executed on August 22, 2023 ([ndot-practical-design2023-1.pdf](#)), Policy DES 23-02 will allow **NDOT** to use newly established 3R (Resurfacing, Restoration, and Rehabilitation) standards for projects on highway segments functionally classified as Expressway, but limited to such expressway segments that allow access only from interchanges (the national functional classification is Freeway). For additional information see Chapter Seventeen: Resurfacing, Restoration and Rehabilitation (3R) Projects, Section 1.F, of this manual

2. DESIGN STANDARDS

The primary sources of roadway design guidance and standards for **NDOT** are A Policy on Geometric Design of Highways and Streets (*Green Book*) (Ref. 1.1), A Policy on Design Standards Interstate System (*I-State Green Book*) (Ref. 1.2), the Nebraska Minimum Design Standards (*MDS*) (Ref. 1.3), and this manual. The *MDS* is in Chapter Two of the Nebraska Administrative Code, Title 428 ([nac-428-rules-regs-nbcs.pdf](#)). The Roadway Design Manual is based on research and publications from **NDOT**, the **American Association of State Highway and Transportation Officials (AASHTO)**, the **Federal Highway Administration (FHWA)**, the **Access Board**, and others.

3. HIGHWAY CLASSIFICATION

3.A Classification

Highway system classification is the grouping of highways by their purpose and function (See EXHIBITS 1.1 AND 1.2). Access and mobility are important factors in determining the classification of a highway. Access and mobility exist in an inverse relationship, the greater the access to the highway the lower the mobility. In the classification of highways the greater the mobility the higher the classification. The highest classification is the Interstate, which provides nationwide mobility but access only at interchanges. Local roads, on the other hand, may provide many direct access points but also provide a lower level of mobility.

The classification of a highway includes the highway's function in a network, context (rural/municipal), traffic volume, trip purposes, and length. Highway system classification is used for roadway identification, selecting the applicable design guidance, project prioritization, and funding purposes for planning, design, traffic operations, and administration of the highway program (minor collectors and local roads are not eligible for Federal-aid funds).

3.A.1 National Highway Functional Classification Map (Nebraska)

(<https://dot.nebraska.gov/travel/map-library/county/>)

(<https://dot.nebraska.gov/travel/map-library/city/>)

This map shows six classes of roadway:

1. Interstate
2. Other Freeways & Expressways
3. Other Principal Arterials
4. Minor Arterial
5. Major Collector
6. Minor Collector (not eligible for Federal-aid funds)

These classes are based on the **AASHTO** functional classes found and defined in the *Green Book* (Ref. 1.1), the *I-State Green Book* (Ref. 1.2), and in the **FHWA** publication Highway Functional Classification Concepts, Criteria and Procedures (Ref. 1.4, <https://www.fhwa.dot.gov/planning/processes/statewide/related/hwy-functional-classification-2023.pdf>).

3.A.2 State Highway Functional Classification Map (Nebraska)

(<https://dot.nebraska.gov/travel/map-library/county/>)

(<https://dot.nebraska.gov/travel/map-library/city/>)

This map shows the following eight roadway classifications:

1. Interstate
2. Expressway
3. Major Arterial
4. Other Arterial
5. Collector
6. Remote Residential (Rural Only)
7. Minimum Maintenance (Rural Only)
8. Scenic Recreation (Rural Only)

The state functional classification defines the characteristics for rural and municipal area roadways, as established in the Reissue Revised Statutes of Nebraska Laws Applicable to the Nebraska Department of Transportation (Containing Chapter 3, Aeronautics; Chapter 39, Highways and Bridges; Chapter 49, Laws, Article 8, Definitions, Construction, and Citation; Chapter 60, Motor Vehicles, Article 6, Nebraska Rules of the Road; and Chapter 81, Article 7, Department of Transportation) ([Nebraska Legislature - Browse Statutes by Chapter](#)) (Ref. 1.5).

RURAL HIGHWAY FUNCTIONAL CLASSIFICATIONS	
FEDERAL HIGHWAY ADMINISTRATION (FHWA) Source: Ref. 1.4	STATE OF NEBRASKA Source: Ref. 1.5
* NDOT has responsibility for the design, construction, reconstruction, maintenance, and operation of the following rural highway classifications.	
Principal Arterial - Interstate: All routes that comprise the Dwight D. Eisenhower National System of Interstate and Defense Highways belong to the Interstate functional classification and are considered Principal Arterials.	Interstate: The federally designated National System of Interstate and Defense Highways.
Principal Arterial - Other Freeways & Expressways: Roadways in this functional classification category look very similar to Interstates. While there can be regional differences in the use of the terms 'freeway' and 'expressway', for the purpose of functional classification the roads in this classification have directional travel lanes, are usually separated by some kind of physical barrier, and their access and egress points are limited to on- and off-ramp locations or a very limited number of at-grade intersections. Like Interstates, these roadways are designed and constructed to maximize their mobility function, and abutting land uses are not directly served by them.	Freeway: An expressway with full control of access and with grade separations at all intersecting road crossings.
	Expressway: A group of highways following major traffic desires in Nebraska which rank next in importance to the National system of Interstate and Defense Highways. The expressway system is one which ultimately should be developed to multilane divided highway standards.
Other Principal Arterials: These roadways serve major centers of metropolitan areas, provide a high degree of mobility and can also provide mobility through rural areas. Unlike their access-controlled counterparts, abutting land uses can be served directly. Forms of access for Other Principal Arterial roadways include driveways to specific parcels and at-grade intersections with other roadways.	Major Arterial: The balance of routes which serve major statewide interests for highway transportation. This system is characterized by high-speed, relatively long-distance travel patterns.
	Scenic-Recreation: Highways or roads located within or which provide access to or through state parks, recreation or wilderness areas, other areas of geographical, historical, geological, recreational, biological, or archeological significance, or areas of scenic beauty.
* The various counties shall have responsibility for the design, construction, reconstruction, maintenance, and operation of the following rural highway classifications.	
Minor Arterial: Minor Arterials provide service for trips of moderate length, serve geographic areas that are smaller than their higher Arterial counterparts and offer connectivity to the higher Arterial system. In rural settings, Minor Arterial should be identified and spaced at intervals consistent with population density, so that all developed areas are within a reasonable distance of a higher level Arterial. Additionally, Minor Arterials in rural areas are typically designed to provide relatively high overall travel speeds, with minimum interference to through movement.	Other Arterial: Highways of less importance as through-travel routes which would serve places of smaller population and smaller recreation areas not served by the higher systems.

* Nebraska Revised Statutes, Chapter 39-2105

Exhibit 1.1 Rural Highway Functional Classifications

RURAL HIGHWAY FUNCTIONAL CLASSIFICATIONS	
FEDERAL HIGHWAY ADMINISTRATION (FHWA) Source: Ref. 1.4	STATE OF NEBRASKA Source: Ref. 1.5
* The various counties shall have responsibility for the design, construction, reconstruction, maintenance, and operation of the following rural highway classifications.	
<p>Major and Minor Collectors: Collectors serve a critical role in the roadway network by gathering traffic from Local Roads and funneling them to the Arterial network. In the rural environment, Collectors generally serve primarily intra-county travel (rather than statewide) and constitute those routes on which (independent of traffic volume) predominant travel distances are shorter than on Arterial routes. Consequently, more moderate speeds may be posted. Generally, Major Collector routes are longer in length; have lower connecting driveway densities; have higher speed limits; are spaced at greater intervals; have higher annual average traffic volumes; and may have more travel lanes than their Minor Collector counterparts. In rural areas, AADT and spacing may be the most significant designation factors; since Major Collectors offer more mobility and Minor Collectors offer more access.</p>	<p>Collector: A group of highways which pick up traffic from many local or land-service roads and carry it to community centers or to the arterial systems. They are the main school bus routes, mail routes, and farm-to-farm market routes.</p>
<p>Local Roads: Local Roads are not intended for use in long distance travel, except at the origin or destination end of the trip, due to their provision of direct access to abutting land. As public roads, they should be accessible for public use throughout the year. Local roads are often classified by default. In other words, once all Arterial and Collector roadways have been identified, all remaining roadways are classified as Local Roads.</p>	<p>Local: All remaining rural roads, except minimum maintenance roads and remote residential roads.</p>
	<p>Minimum Maintenance: (a) Roads used occasionally by a limited number of people as alternative access roads for areas served primarily by local, collector, or arterial roads or (b) roads which are the principal access roads to agricultural lands for farm machinery and which are not used by passenger or commercial vehicles.</p> <p>Remote Residential: Roads or segments of roads in remote areas of counties with (a) a population density of no more than five people per square mile or (b) an area of at least one thousand square miles, and which roads or segment of roads serve as primary access to no more than seven residences. For purposes of this subdivision, residence means a structure which serves as a primary residence for more than six months of a calendar year. Population shall be determined using data from the most recent federal decennial census.</p>

* Nebraska Revised Statutes, Chapter 39-2105

Exhibit 1.1 Rural Highway Functional Classifications (Continued)

MUNICIPAL HIGHWAY FUNCTIONAL CLASSIFICATIONS	
FEDERAL HIGHWAY ADMINISTRATION (FHWA) Source: Ref. 1.4	STATE OF NEBRASKA Source: Ref. 1.5
* NDOT has responsibility for the design, construction, reconstruction, maintenance, and operation of the following municipal highway classifications.	
Principal Arterial - Interstate: All routes that comprise the Dwight D. Eisenhower National System of Interstate and Defense Highways belong to the Interstate functional classification and are considered Principal Arterials.	Interstate: The federally designated National System of Interstate and Defense Highways.
Principal Arterial - Other Freeways & Expressways: Roadways in this functional classification category look very similar to Interstates. While there can be regional differences in the use of the terms 'freeway' and 'expressway', for the purpose of functional classification the roads in this classification have directional travel lanes, are usually separated by some kind of physical barrier, and their access and egress points are limited to on- and off-ramp locations or a very limited number of at-grade intersections. Like Interstates, these roadways are designed and constructed to maximize their mobility function, and abutting land uses are not directly served by them.	Freeway: An expressway with full control of access and with grade separations at all intersecting road crossings.
	Expressway: (a) Extensions of rural expressways and (b) some additional routes which serve very high volumes of local traffic within urban areas.
Other Principal Arterials: These roadways serve major centers of metropolitan areas, provide a high degree of mobility and can also provide mobility through rural areas. Unlike their access-controlled counterparts, abutting land uses can be served directly. Forms of access for Other Principal Arterial roadways include driveways to specific parcels and at-grade intersections with other roadways.	Major Arterial: Extensions of the rural major arterials which provide continuous service through municipalities for long-distance rural travel. They are the arterial streets used to transport products into and out of municipalities

* Nebraska Revised Statutes, Chapter 39-2105

Exhibit 1.2 Municipal Highway Functional Classifications

MUNICIPAL HIGHWAY FUNCTIONAL CLASSIFICATIONS	
FEDERAL HIGHWAY ADMINISTRATION (FHWA) Source: Ref. 1.4	STATE OF NEBRASKA Source: Ref. 1.5
<p>* The various counties and local governments shall have responsibility for the design, construction, reconstruction, maintenance, and operation of the following municipal highway classifications.</p>	
<p>Minor Arterial: Minor Arterials provide service for trips of moderate length, serve geographic areas that are smaller than their higher Arterial counterparts and offer connectivity to the higher Arterial system. In an urban context, they interconnect and augment the higher Arterial system, provide intra-community continuity and may carry local bus routes.</p>	<p>Other Arterial: (a) Municipal extensions of rural other arterials and (b) arterial movements peculiar to a municipality's own complex, that is streets which interconnect major areas of activity within a municipality, such as shopping centers, the central business district, manufacturing center, and industrial parks.</p>
<p>Major and Minor Collectors: Collectors serve a critical role in the roadway network by gathering traffic from Local Roads and funneling them to the Arterial network. Collectors serve both land access and traffic circulation in residential and commercial/industrial areas. Operating characteristics of Major Collectors differ from Minor Collectors in length (usually greater than three-quarters of a mile), higher speeds and more signalized intersections.</p>	<p>Collector: A group of streets which collect traffic from residential streets and move it to smaller commercial centers or to higher arterial systems.</p>
<p>Local Roads: Urban Local Roads provide direct access to adjacent land, provide access to higher roadways systems and carry no through traffic movements. As public roads, they should be accessible for public use throughout the year. Local roads are often classified by default. In other words, once all Arterial and Collector roadways have been identified, all remaining roadways are classified as Local Roads.</p>	<p>Local: The balance of streets in each municipality, principally residential access service streets and local business streets. They are characterized by very short trip lengths, almost exclusively limited to vehicles desiring to go to or from an adjacent property.</p>

* Nebraska Revised Statutes, Chapter 39-2105

Exhibit 1.2 Municipal Highway Functional Classifications (Continued)

4. HIGHWAY SYSTEMS

Highways may be networked into a system based on their intended function. The same highway may be part of multiple systems, for example the Interstate is part of the National Highway System, the Strategic Highway Network, and the National Highway Freight Network.

4.A Interstate System

(<https://www.fhwa.dot.gov/programadmin/interstate.cfm>).

The Dwight D. Eisenhower National System of Interstate and Defense Highways (Interstate System) is a national defense system of highways consisting of routes built to uniform geometric and construction standards. This system connects the principal metropolitan areas, cities, and industrial centers of the United States and, to the greatest extent possible, connects the border routes of continental importance with Canada and Mexico. A map showing the Interstate routes in Nebraska is available at (https://dot.nebraska.gov/media/msqjmmqg/nat_hwy_sys.pdf).

4.B National Highway System (NHS)

(https://www.fhwa.dot.gov/planning/national_highway_system/)

The AASHTO Transportation Glossary (2009) defines the NHS as “A system of highway routes and connections to transportation facilities consisting of the Interstate System, other urban and rural arterial routes, and other connector highways to major intermodal transportation facilities.” The NHS serves interstate and interregional travel and includes the Strategic Highway Network, meeting national defense requirements. A map showing the NHS routes in Nebraska is available at (http://www.fhwa.dot.gov/planning/national_highway_system/nhs_maps/nebraska/).

4.C Strategic Highway Network (STRAHNET)

As defined by the U.S. Department of Defense, “STRAHNET is a system of public highways that are a key part of the deployment of the United States Armed Forces. It provides defense access, continuity, and emergency capabilities for movements of personnel and equipment in both peace time and war.” The National Highway System Designation Act of 1995 provided for the inclusion of STRAHNET and STRAHNET connectors into the NHS. Additional information may be found at (<https://www.fhwa.dot.gov/policy/2004cpr/chap18.cfm>).

4.D **National Highway Freight Network**
(<https://ops.fhwa.dot.gov/freight/infrastructure/nfn/index.htm>)

In 2012, the Moving Ahead for Progress in the 21st Century Act (MAP-21) required the **United States Department of Transportation (USDOT)** to establish a National Freight Network to assist the states in directing resources towards improving the movement of freight on the nation's highways. This network consisted of:

- A primary freight network (PFN), designated by the Secretary of the **USDOT**
- Any portions of the Interstate System not designated as part of the PFN
- Critical rural freight corridors

In 2015, the Fixing America's Surface Transportation Act (FAST) established the National Highway Freight Program to improve the efficient movement of freight on the National Highway Freight Network. Section 1116 of the FAST Act provided for a new National Highway Freight Network (NHFN), replacing the National Freight Network established under MAP-21.

The NHFN includes the following subsystem of roadways:

- a. Primary Highway Freight System (PHFS) - This is a network of highways identified as the most critical highway portions of the U.S. freight transportation system. The initial designation of the PHFS is highway-only Primary Freight Network (PFN) created under MAP-21.
- b. Interstate Routes not on the PHFS - These highways consist of the remaining portion of Interstate roads not designated as part of the PHFS. These routes provide important continuity and access to freight transportation facilities.
- c. Critical Rural Freight Corridors (CRFC) - These are public roads not in an urbanized area which provide access and connection to the PHFS and the Interstate with other important ports, public transportation facilities, or other intermodal freight facilities.
- d. Critical Urban Freight Corridors (CUFC) - These are public roads in urbanized areas which provide access and connection to the PHFS and the Interstate with other ports, public transportation facilities, or other intermodal transportation facilities.

A map showing the NHFN in Nebraska is available at
(https://ops.fhwa.dot.gov/freight/infrastructure/ismt/state_maps/states/nebraska.htm).

For additional information see the **FHWA** Memorandum "National Highway Freight Program (NHFP), FAST Act Section 1116 Implementation Guidance"
(https://ops.fhwa.dot.gov/freight/pol_plng_finance/policy/fastact/s1116nhfpguidance/).

4.E Nebraska Expressway System

(<https://dot.nebraska.gov/media/edshoshk/expressway-system-nebraska.pdf>)

State law authorized the development of the Nebraska Expressway System (Expressway System) in 1988 (Nebraska Revised Statutes, Chapter 39-1365). The Expressway System generally consists of multi-lane divided highways. Access to the expressway other than at public roads will be limited; interchanges may be built where an expressway intersects with high volume highways. The intent of the expressway system is to:

1. Connect urban centers of 15,000 population or greater to the Interstate System,
2. Add those routes which have an average daily traffic of 500 or more heavy commercial vehicles, and
3. Add additional segments as required for continuity.

The Expressway System is also shown on the State and National Functional Classification Maps (<https://dot.nebraska.gov/travel/map-library/func-by-county/>) (<https://dot.nebraska.gov/travel/map-library/func-by-city/>).

4.F Nebraska Priority Commercial System

The 1988 Department Needs Study initiated the creation of the Nebraska Priority Commercial System, providing a continuous network of routes designed to carry higher traffic volumes, especially larger volumes of commercial vehicles. The Nebraska Priority Commercial System consists of the non-Interstate National Highway System and the Nebraska Expressway System. This system directly serves the first class cities (5,001 – 100,000 population), and directly or indirectly serves the majority of the second class cities (800 - 5,000 population). For additional information, see Chapter Six: The Typical Roadway Cross-Section, Section 2.A.1, of this manual.

4.G Nebraska 28 Foot Top System

Highways in the Sandhills area, highways with $\geq 1,000$ future ADT, and highways that link US-6, US-30, or US-34 to the Interstate should have a 28-foot pavement width, striped at 24 feet, and shoulders appropriate for design year traffic (See the *MDS*, Ref. 1.3 and Chapter Six: The Typical Roadway Cross-Section, Section 2.A.2, and EXHIBITS 6.4 AND 6.5 of this manual). The intent of the additional surfacing width is to lessen the probability of vehicles leaving the roadway and to reduce erosion problems.

4.H Other Nebraska State Highways

(<https://dot.nebraska.gov/media/pyph2n2c/current-state-highway-system.pdf>)

In addition to the previously mentioned highways, **NDOT** is responsible for the administration of the state highway system for the efficient movement of people and goods throughout the State of Nebraska.

5. CAPITAL IMPROVEMENT VS SYSTEM PRESERVATION

Capital improvements (New and Reconstructed projects, See Section 6.A) consist of major modification road projects that extend beyond the work permitted under 3R. These projects generally entail a correction of vertical or horizontal alignment, removal and replacement of the surfacing and base, increase in capacity, and/or construction on a new alignment.

System Preservation projects consist of focused improvements toward a specific asset that the project is intended to preserve. These projects consist of 3R projects (See Section 6.B) and Preventive Maintenance projects.

1. **NDOT** 3R projects preserve highway assets (i.e. pavement or bridges) by addressing deficiencies in the pavement structure and may address safety and operational issues, primarily within the existing roadway footprint.
2. Preventive Maintenance projects (See Section 6.C.2) maintain the existing roadway to its original condition, maintain a minimum condition of bridges, and maintain, and in some instances upgrade, roadside appurtenances such as guardrail. Some maintenance system preservation work is not contracted and subsequently is performed by state maintenance forces.

6. APPLICATION OF DESIGN CRITERIA

6.A New and Reconstructed Criteria

The primary focus of this manual is the design of New and Reconstructed projects. New and Reconstructed projects have an expected service life exceeding 20 years and generally consist of:

- Construction of a new road
- Relocating an existing route on new alignment
- Removal of the pavement structure and construction of a new base or the modification of the existing base, which will be designed to reconstruction standards
 - Modification of the base is defined as improving or strengthening the existing base through chemical (fly ash, lime, etc.) or mechanical (geofabric, geogrid, etc.) means and will require designing to reconstruction standards
- Building a new bridge or reconstructing an existing bridge
- Adding through lanes to the existing alignment

New and Reconstructed projects should be considered when:

- The crash history indicates the need for improvements that can significantly reduce the crash rate
- Meeting 3R standards will require that significant existing geometric deficiencies be corrected
- Significant grading is to be done which requires major right-of-way to be acquired and/or major utility relocations

The minimum design standards for New and Reconstructed projects on the NHS may be found in the *Green Book* (Ref. 1.1), the *I-State Green Book* (Ref. 1.2), and in Section 9 of this chapter. Design standards for projects not on the NHS have been issued by the **Board of Public Roads Classifications and Standards** and may be found in the *MDS* (Ref. 1.3). Note: rural and suburban areas exhibiting urban characteristics may be designed to municipal design standards.

Practical design considerations may allow application of 3R standards to a segment (or segments) of the current New and Reconstructed project (e.g. reconstructing the pavement structure at the existing width without modification of the existing base).

6.B Resurfacing, Restoration and Rehabilitation (3R) Criteria

3R projects are generally undertaken to preserve the highway assets, improve the reliability of the transportation system, maintain the mobility of the highway user, mitigate highway safety issues identified through crash history, and operational issues identified through analysis. Generally, it is not the purpose of 3R projects to increase highway capacity. A 3R resurfacing strategy typically has an expected service life of up to 20 years.

Application of 3R design standards to a pavement resurfacing project is, for the most part, determined by the pavement recommendation.

1. Pavement recommendations that address deficiencies in the pavement structure and increase the structural capacity and extend the life of the facility by up to 20 years will usually be designed to 3R standards. Pavement recommendations that require pavement replacement and restoration of the base can be designed to 3R standards. Restoration of the base is defined as restoring the original condition of the base (subgrade preparation). A portion of the existing base may be removed to accommodate the required pavement thickness based on the pavement recommendation.
2. Pavement recommendations that require removal of the entire pavement structure and the construction of a new base or the modification of the existing base will be designed to New and Reconstructed standards. Modification of the base is defined as improving (addition of a drainage layer) or strengthening the existing base through chemical (fly ash, lime, etc.) or mechanical (geofabric, geogrid, etc.) means. However, practical design considerations may allow application of 3R standards to a segment (or segments) of the current New and Reconstructed project (e.g. reconstructing the pavement structure at the existing width without modification of the existing base).

3R design utilizes a cost/benefit paradigm, including such strategies such as Practical Design, 2+2 Projects, and Super 2 Roadways.

For **NDOT** 3R guidance, see Chapter Seventeen: Resurfacing, Restoration and Rehabilitation (3R) Projects of this manual and the *MDS* (Ref. 1.3). Note: rural and suburban areas exhibiting urban characteristics may be designed to 3R municipal design standards.

6.B.1 Bridge Rehabilitation (3R) Work

The **Bridge Division (Bridge)** supplies the bridge recommendation, which provides the scope of work on the structures for a project.

In general, the scope of work for bridge rehabilitation projects (3R) may include, but is not limited to:

- Partial or complete replacement of the existing deck, including adding new bridge approaches on pile
- Replacement and/or strengthening (Rehabilitation) of the superstructure
 - When bridge decks are replaced or rehabilitated with Federal financial participation, pedestrians or bicyclists generally must be accommodated (See 23 U.S.C. 217(e), [23 USC 217 - Bicycle transportation and pedestrian walkways](#)). Existing pedestrian/bicyclist access should be maintained.
- Repairs to the substructure
- Incidental widening associated with these activities

Bridge rehabilitation work is eligible for federal-aid funding. For additional information see the **Federal Highway Administration (FHWA)** publication [Bridge Preservation Guide](#) (Ref. 1.9) ([FHWA Bridge Preservation Guide](#)) and Chapter Seventeen: [Resurfacing, Restoration and Rehabilitation \(3R\) Projects](#), Section 10.B, of this manual.

6.C Maintenance Projects

6.C.1 Routine Maintenance

Routine maintenance is work performed on a regular basis to maintain and preserve the condition of the highway at a satisfactory level of service. Examples of routine maintenance include but are not limited to:

- Mowing the roadside
- Snow removal
- Clearing of ditches and drainage structures
- Maintenance of pavement markings
- Crack filling
- Pothole patching
- Isolated overlays

NDOT employees generally perform routine maintenance, which is not ordinarily eligible for federal-aid funding.

6.C.1.a Routine Bridge Maintenance Activities

Routine bridge maintenance activities are performed on a regular basis in response to operational needs and do not generally extend the useful life of the structure. Examples of routine bridge maintenance activities include:

- Trash Removal
- Snow Removal
- Application of Deicers
- Asphalt Patching
- Repairing Accident Damage (Bridge, Appurtenances)
- Repairing Storm Damage

NDOT employees generally perform routine bridge maintenance, which is not ordinarily eligible for federal-aid funding. For additional information see the **FHWA** publication Bridge Preservation Guide (Ref. 1.9).

6.C.2 Preventive Maintenance

Preventive Maintenance projects are programmed for the restoration of the existing mainline roadway surfacing back to its' original condition without significantly increasing the structural capacity. Preventive Maintenance is typically applied to pavements in good condition which have significant service life remaining. The **Board of Public Roads Classifications and Standards** has issued maintenance standards applicable for each functional classification of roadway (Chapter 2, Section 003, of the *MDS*, Ref. 1.3). Building curb ramps and upgrading roadway appurtenances (such as guardrail) are allowed on Preventive Maintenance projects. Mailbox turnouts will not generally be surfaced on a Preventative Maintenance project. A Preventive Maintenance project has an expected service life of up to 12 years.

Application of Preventive Maintenance standards to a project is generally determined by the pavement recommendation. A grade raise of two inches or less of surfacing, or its equivalent (See below), is permissible. More than a two-inch grade raise will indicate the initial programming of a 3R project, pending further investigation.

M&R has determined that one inch of in place recycle is structurally equivalent to one-quarter inch of Hot Mix Asphalt, e.g. a pavement determination of two inches of in place recycle followed by a one and one-half inch overlay is equivalent to a two-inch grade raise. In place recycling strategies include Cement Stabilized Bituminous, Fly Ash Stabilized Bituminous, Hydrated Lime Slurry Stabilization, Cold in place recycle with foam, and Hot in place recycle.

6.C.2.a Bridge Preventive Maintenance Activities

Bridge preventive maintenance extends the useful life of a bridge by the application of cost-effective treatments to bridges in good or fair condition. Bridge preventive maintenance may be cyclical or condition-based in nature.

Cyclical bridge maintenance consists of recurring activities, scheduled to preserve the bridge elements and to delay their deterioration. Examples of cyclical bridge maintenance activities include:

- Bridge Cleaning (Deck, Superstructure, Substructure)
- Cleaning and Flushing the Drains
- Cleaning Joints
- Deck/Parapet/Rail Sealing and Crack Sealing
- Concrete Sealing

Condition-based bridge maintenance work is performed to improve the condition of known defects of bridge components. Examples of work allowed on a condition-based Preventive Maintenance Bridge project include:

Deck:

- Overlays (Polymer, Asphalt with waterproof membrane, Rigid overlays)
- Approach Slabs (Repairs, Replacement of existing approach slabs)
- Slab Turndowns (Eliminate end-of-floor joint and encase girder ends)
- Joints (Repair, Replace, Eliminate)
- Joint Seals (Replace)
- Drains (Repair, Replace)
- Electrochemical Extraction (ECE)/Cathodic Protection (CP)
- General Repairs (Deck repairs, Bridge Rail and Buttness update and repairs)

Superstructure:

- Structural Steel Repair/Retrofit (Fracture critical details, Fatigue prone details)
- Painting (Zone coat girder ends, Complete re-painting of steel superstructure)
- Bearing Restoration (Cleaning, Lubrication, Resetting, Repair, Replacement, Passive zinc anodes)
- Concrete (Seal, Patch, Repair)
- Protective Coat (Concrete/Steel Elements)
- Fatigue Crack Mitigation (Pin-and-hanger replacement, Retrofit fracture critical members)
- Movable Bridge Machinery (Cleaning, Lubrication, Repair)
- General Repairs (End of girder repairs, Damaged elements)

Substructure:

- Concrete (Patch, Repair)
- Corrosion Protection & Mitigation (Passive zinc anodes, Electrochemical chloride extraction)
- Protective Coat (Concrete/Steel Elements)
- Painting (Spot, Zone, Complete re-painting of steel substructure)
- Pile Preservation (Repairs, Jackets w/epoxy grout, Concrete encasement, Painting of steel bearing piles, Cathodic protection)
- General Repairs (Abutment & piers, Damaged elements)

Channel:

- Scour Counter Measures (Installation, Repair)
- Channel Cleaning (Debris removal)

Cyclical and condition-based bridge preventive maintenance work is eligible for federal-aid funding. For additional information see the **FHWA** publication Bridge Preservation Guide (Ref. 1.9).

Guardrail:

On Preventive Maintenance Bridge projects, guardrail attached to the bridge rail will be reviewed for:

- Impacts to the guardrail (has the guardrail been hit) and condition of the guardrail
- NCHRP or MASH compliance
- A minimum height of 28 inches above the surfacing for the Bridge Approach Section (BAS)
- A minimum height of 26½ inches above the surfacing for the W-Beam guardrail, in accordance with the Roadside Design Guide (Ref. 1.7)

If necessary, the guardrail will be raised to meet the above listed minimum heights and used in place. If the guardrail is unable to meet the above listed minimum heights or does not meet NCHRP 350 standards, the installation will be reviewed for possible replacement and upgrade to MASH standards. If the guardrail is to be used in place, a decision document requiring **NDOT Roadway Design Unit Head (Unit Head)** approval will be placed in the document file.

6.D Safety Improvement Projects

<https://dot.nebraska.gov/business-center/lpa/projects/programs/hsip/>

Safety improvement projects are usually located at specific significant crash sites. Significant crash locations are identified and evaluated for cost effectiveness and the **Highway Safety Improvement Plan Implementation Team** addresses critical areas, with federal funds, on a case-by-case basis. The **NDOT District Engineer (DE)** may also request a study of individual locations. Safety improvement projects are designed with 10-year traffic forecasts. These projects may include such actions as:

- Changing intersection geometry
- Adding left turn lanes
- Minor radii improvements
- Sight distance improvements

Safety improvement projects are designated as either 3R or the appropriate New and Reconstructed standard. Cost sharing guidelines for safety improvement projects in municipal areas are outlined in NDOT Operating Instruction DOT-OI 60-11, "Municipal Cost Sharing" (Appendix B, "Selected NDOT Operating Instructions").

7. DESIGN CONTROLS

Once the functional classification of the roadway is known and the type of roadway improvement determined, several basic factors serve as design controls. These controls are determinants for other geometric design standards. See the *Green Book* (Ref. 1.1), the *I-State Green Book* (Ref. 1.2) and the *MDS* (Ref. 1.3) for additional information. Design controls for 3R projects are addressed in Chapter Seventeen: Resurfacing, Restoration and Rehabilitation (3R) Projects, Section 1.B, of this manual.

7.A Design Year Forecast Traffic

The design year forecast traffic data (ADT, DHV, % Heavy Trucks, etc.) is based on the life expectancy of the roadway surfacing. The design year for New and Reconstructed projects and for 3R projects is the year of initial construction plus 20 years. Maintenance projects do not require forecast traffic data.

The designer should contact the **Traffic Analysis Section** of the **Strategic Planning Division** for design year forecast traffic data.

7.B Design Speed

The desirable design speed for a New and Reconstructed project is five mph greater than the anticipated posted speed limit for the roadway, except for low-speed municipal projects (≤ 45 mph) where the design speed should be the anticipated posted speed limit. The minimum design speed may be found in the *MDS* (Ref. 1.3). Where the design speed from the *MDS* is greater than the anticipated posted speed limit the design speed from the standards will be used. For example, if the design speed from the *MDS* is 60 mph and the anticipated posted speed limit of the roadway is 50 mph, a design speed of 60 mph will be used.

Reduction of the desirable design speed to the minimum design speed will require **NDOT Roadway Design Assistant Design Engineer (ADE)** approval. A design relaxation will be required to design to less than the design speed provided in the *MDS* (Ref. 1.3) (See Section 11.C of this chapter).

7.C Sight Distance

Sight distance includes stopping sight distance, passing sight distance, and intersection sight distance. For further discussion of sight distance see Chapter Four: Intersections, Driveways and Channelization, Section 1.C.2 of this manual and Chapter 3, Section 3.2 and Chapter 9, Section 9.5 of the *Green Book* (Ref. 1.1).

7.D Terrain

Terrain is a design control affecting alignment. Two types of terrain, defined in Chapter 3, Section 3.4.1 of the *Green Book* (Ref. 1.1), are found in Nebraska:

1. **Level:** Highway sight distances, as governed by both horizontal and vertical restrictions, are generally long or can be made to be so without construction difficulty or major expense.
2. **Rolling:** Natural slopes which consistently rise above and fall below the road or street grade, and occasional steep slopes offer some restriction to normal horizontal and vertical roadway alignment.

7.E Roadside Design

Horizontal Clear Zone: For New and Reconstructed projects, the Horizontal Clear Zone is the roadside area, starting at the edge of the travel lane, which is available for errant vehicles leaving the roadway. The Horizontal Clear Zone provides an area free of fixed obstacles and may consist of the shoulder, a recoverable slope, a non-recoverable but traversable slope, and/or a clear runout area. The required clear zone distance will vary based on the projects' design standard (See the *MDS*, Ref. 1.3). See Chapter Six: The Typical Roadway Cross-Section, Section 9.A.1, of this manual for additional information.

Fixed Obstacle Clearance: For 3R projects, the Fixed Obstacle Clearance, as presented in the *MDS* (Ref. 1.3), provides a roadside environment free of fixed obstacles, reducing the opportunity for off-road impacts. See Chapter Six: The Typical Roadway Cross-Section, Section 9.A.2, of this manual for additional information.

7.F Context (Rural/Municipal)

Separate design standards have been developed for rural and municipal (urban) areas. Rural highways consist of public highways and roads outside the limits of an incorporated municipality; municipal streets are public streets within the limits of an incorporated municipality. Typical cross-sections will differ depending upon rural/municipal location. Rural design standards reflect the higher design speeds and more flexible right-of-way opportunities possible in rural areas while municipal design standards are based on the lower design speeds, restricted rights-of-way, and higher traffic volumes common in urban areas. Rural locations exhibiting municipal characteristics may be designed to municipal standards.

AASHTO has found it advisable to expand the traditional rural/municipal definition to five contexts, based not only on location but also on development density, land uses, and building setbacks. For further information see Section 9 of this chapter.

7.G Access Control

Access control improves operational efficiency by limiting the number and location of access points along the highway (access control points are interchanges, intersections, driveways and field entrances). This increases the efficient movement of through traffic and reduces the potential for roadway crashes by minimizing the number of conflict points located along the highway. For further information see Chapter Fifteen: Right-of-Way, Section 3, of this manual.

8. THE CONTROLLING DESIGN CRITERIA

Through research and practical experience, minimum guidance has been established for the geometric design elements of a roadway project. The minimum values for the design criteria are based on such parameters as design speed, roadway location, functional classification of the roadway, traffic volume, and the design vehicle. **FHWA** has adopted the *I-State Green Book* (Ref. 1.2) and the *Green Book* (Ref. 1.1) as their source of roadway design guidance.

FHWA has identified ten elements of roadway geometry for all Interstate, freeway, and high-speed roadway (≥ 50 mph) projects and two design elements for low-speed roadway (≤ 45 mph) projects as being of such importance that when the minimum design standard cannot be attained for a project on the NHS and/or for a **FHWA** Risk Based Project (RBP for Design), a design exception will be required (for additional information see [Design Decision Documentation and Mitigation Strategies for Design Exceptions](#) ([Design Decision Documentation and Mitigation Strategies for Design Exceptions \(dot.gov\)](#)) and Section 11.A of this chapter). This same rationale was used in the creation of the *MDS* (Ref. 1.3). If a design criterion on any highway project cannot meet the minimum design standard, a relaxation of the *MDS* will be required (See Section 11.B of this chapter). The **FHWA** standards are:

FHWA Controlling Design Elements for Interstate, Freeway, and High-Speed (≥ 50 mph) Roadways		
	Element	Definition
1	Design Speed	The speed selected to control the geometric features of the project
2	Lane Width	The appropriate width to be used for the through travel lanes
3	Shoulder Width	The appropriate shoulder width for the roadway
4	Horizontal Curve Radius	The horizontal curvature of the roadway
5	Superelevation Rate	The appropriate cross slope of the roadway through a horizontal curve
6	Maximum Grade	The rate of change in the elevation of a roadway, expressed as a percentage
7	Stopping Sight Distance	The distance required by a driver to see an object on the roadway and to bring the vehicle to a safe stop before colliding with that object
8	Cross Slope	The cross slope aids in draining the roadway and shoulder
9	Vertical Clearance	The clear distance required between the top of the pavement and an overhead object across the entire width of the roadway
10	Structural Capacity	The load carrying capacity of a bridge or bridge sized structure

FHWA Controlling Design Elements for Low-Speed (≤ 45 mph) Roadways		
	Element	Definition
1	Design Speed	The speed selected to control the geometric features of the project
2	Structural Capacity	The load carrying capacity of a bridge or bridge sized structure

NDOT has added four controlling design criteria to the *MDS*:

11	Vertical Alignment	The vertical curvature of the roadway
12	Horizontal Clear Zone/Fixed Obstacle Clearance	For New and Reconstructed projects, the Horizontal Clear Zone is the roadside area, starting at the edge of the travel lane, which is available for the recovery of errant vehicles. For 3R projects, the Fixed Obstacle Clearance provides an obstacle free zone in the roadside environment.
13	Lateral Offset to Obstruction	The distance from the edge of the traveled way to a vertical roadside object. Lateral offset to obstruction should not be confused with the Horizontal Clear Zone/Fixed Obstacle Clearance (See Section 8.B of this chapter)
14	Bridge Width	The width of the lanes and shoulders carried across the bridge, measured from bridge rail to bridge rail or curb to curb

These four additional items are not **FHWA** design criteria; inability to meet the minimum standard will not require a design exception but will require a relaxation of the *MDS* (See Section 11.B of this chapter).

The 14 controlling design criteria in the MDS will apply to all roadway classifications (State and Federal) and all design speeds.

8.A NDOT Non-Controlling Design Criteria

Four additional items have been determined by **NDOT** to be important to the design of a roadway while not rising to the level of a controlling criterion. These non-controlling items are:

1. **Barrier Crashworthiness:** Determine if the roadside barriers (e.g. guardrail, bridge rail) are compliant with MASH or NCHRP 350.
2. **Hydraulic Design:** Determine the appropriate **NDOT** Design Storm Frequency for the drainage system components (e.g. culverts, storm sewers, roadway ditches). See the Drainage Design and Erosion Control Manual, EXHIBIT 1.3, "Design Storm Frequencies".
3. **Pavement Design:** Determine if the projected life expectancy of the pavement is equal to or greater than the project design year.
4. **ADA Accessibility:** Determine if the project meets the guidance found in the Accessibility Guidelines for Pedestrian Facilities in the Public Right-of-Way (2023) and if existing barriers to access will be eliminated. Any requirements which the **NDOT Roadway Design Engineer** determines to be technically infeasible shall be documented in the project file with the **NDOT Roadway Design Engineer's** signature. For additional information see Chapter Sixteen: Pedestrian and Bicycle Facilities of this manual.

An inability to meet the minimum guidance for these items will require written **Unit Head** approval and justification to the project file except as noted above.

8.B Nominal Shoulder Width for Lateral Offset to Obstruction

8.B.1 Highways With an ADT < 400 VPD

The lateral offset (nominal shoulder width) is given in EXHIBITS 1.3 AND 1.4. Roadside barriers may be placed at the outer edge of the shoulder; however, it is desirable to provide a minimum clearance of four feet from the edge of the traveled way to the barrier. No approval is necessary for the design decision.

8.B.2 Highways With an ADT \geq 400 VPD

The lateral offset (nominal shoulder width) is given in EXHIBITS 1.3 AND 1.4.

- On a paved or a turf only shoulder, the nominal shoulder width is the shoulder width. For example, on a New and Reconstructed Interstate project with high truck traffic, the shoulder widths are four foot left and 12 foot right, which is also the nominal shoulder width and the lateral offset to obstruction.
- On a shoulder with both a paved and a turf section, the nominal shoulder width is the total shoulder width. For example, on a New and Reconstructed Major Arterial project with an ADT between 2,000 and 3,999 the shoulder width is eight foot total with two foot paved. The nominal shoulder width and the lateral offset to obstruction is eight feet.

NEW AND RECONSTRUCTED RURAL

State Functional Classification	National Functional Classification	Lateral Offset to Obstruction
Interstate	Interstate	The paved shoulder width
Expressway (Access Only at Interchanges)	Other Freeways and Expressways	The paved shoulder width
Expressway	Other Freeways and Expressways	Left = 4 feet/Right = 8 feet
Major Arterial	Other Principal Arterials or Minor Arterial	ADT ≥ 1,000 VPD: 8 feet ADT 400 – 999 VPD: 6 feet ADT < 400 VPD: 4 feet
Major Arterial	Major Collector, Minor Collector or Local	ADT ≥ 2,000 VPD: 8 feet ADT 400 – 1,999 VPD: 6 feet ADT < 400 VPD: 4 feet
Scenic Recreation – Major Arterial	Other Principal Arterials, Minor Arterial, Major Collector or Minor Collector	Design Speed ≥ 50 mph: 6 feet Design Speed < 50 mph: 4 feet desirable 2 feet minimum

NEW AND RECONSTRUCTED MUNICIPAL

State Functional Classification	National Functional Classification	Lateral Offset to Obstruction
Interstate	Interstate	The paved shoulder width
Expressway (Access Only at Interchanges)	Other Freeways and Expressways	The paved shoulder width
Expressway	Other Freeways and Expressways	Curbed: 1.5 feet from the face of the curb Non-Curbed: Left = 4 feet Right = 8 feet
Major Arterial	Other Principal Arterials or Minor Arterial	Curbed: 1.5 feet from the face of the curb Non-Curbed: ADT ≥ 2,000 VPD: 8 feet ADT 400 – 1,999 VPD: 6 feet ADT < 400 VPD: 4 feet
Major Arterial	Major Collector or Minor Collector	Curbed: 1.5 feet from the face of the curb Non-Curbed: ADT ≥ 2,000 VPD: 8 feet ADT 400 – 1,999 VPD: 6 feet ADT < 400 VPD: 4 feet desirable 2 feet minimum

Exhibit 1.3 Lateral Offset to Obstruction – New and Reconstructed Projects

RESURFACING, RESTORATION AND REHABILITATION (3R)
RURAL

State Functional Classification	National Functional Classification	Lateral Offset to Obstruction
Interstate	Interstate	The paved shoulder width
Expressway	Other Freeways and Expressways	The paved shoulder width
Major Arterial	Other Principal Arterials or Minor Arterial	ADT ≥ 2,000 VPD: 6 feet ADT < 2,000 VPD: 4 feet desirable 2 feet minimum
Major Arterial	Major Collector, Minor Collector or Local	ADT ≥ 2,000 VPD: 6 feet ADT < 2,000 VPD: 4 feet desirable 2 feet minimum
Scenic Recreation – Major Arterial	Other Principal Arterials, Minor Arterial, Major Collector or Minor Collector	4 feet desirable 2 feet minimum

RESURFACING, RESTORATION AND REHABILITATION (3R)
MUNICIPAL

State Functional Classification	National Functional Classification	Lateral Offset to Obstruction
Interstate	Interstate	The paved shoulder width
Expressway	Other Freeways and Expressways	Curbed: 1.5 feet from the face of the curb Non-Curbed: 8 feet
Major Arterial	Other Principal Arterials or Minor Arterial	Curbed: 1.5 feet from the face of the curb Non-Curbed: ADT ≥ 4,000 VPD: 8 feet ADT 2,000 – 3,999 VPD: 5 feet ADT < 2,000 VPD: 4 feet desirable 2 feet minimum
Major Arterial	Major Collector or Minor Collector	Curbed: 1.5 feet from the face of the curb Non-Curbed: ADT ≥ 4,000 VPD: 8 feet ADT 2,000 – 3,999 VPD: 5 feet ADT < 2,000 VPD: 4 feet desirable 2 feet minimum

Exhibit 1.4 Lateral Offset to Obstruction – Resurfacing, Restoration and Rehabilitation (3R) Projects

8.C NDOT Desirable Design Guidance

NDOT has established preferred guidance for the following design criteria. This guidance will be used on all projects, where practicable.

- **Design Speed:** The desirable design speed for a New and Reconstructed project is five mph greater than the anticipated posted speed limit for the roadway, except for low-speed municipal projects (≤ 45 mph) where the design speed should be the anticipated posted speed limit. (See Section 7.B of this chapter).
- **Design Speed – Left-in-Place Median Crossovers:** A desirable design speed of 65 mph (See Chapter Five: Interstates, Grade Separations, and Interchanges, Section 1.H.4, of this manual).
- **Design Speed – Interstate Phasing:** The design speed for phasing is 10 mph below the posted speed limit. (See Chapter Five: Interstates, Grade Separations, and Interchanges, Section 2.B, of this manual).
- **Design Speed – Temporary Roads:** As a rule-of-thumb, the design speed for the temporary road should be 10 mph less than the existing posted speed. (See Chapter Fourteen: Traffic, Section 6.B, of this manual).
- **Design Vehicle** - The use of a design vehicle smaller than the minimum listed in EXHIBIT 4.13 requires **Unit Head** approval. (See Chapter Four: Intersections, Driveways and Channelization, EXHIBIT 4.13, of this manual).
- **Intersection Turning Radius** - The minimum allowable distance between the inside edge of the full depth pavement and the outside edge of the tires of the turning design vehicle is two feet; the desirable distance is three feet. (See Chapter Four: Intersections, Driveways and Channelization, Section 1.C.6, of this manual).
- **Superelevation:** For rural highways and for bridge structures, a desirable maximum superelevation rate of 6% should be used unless design constraints dictate the use of the 8% maximum superelevation rate. The use of the maximum superelevation rate of 8% requires **ADE** approval and a decision letter to the project file. (See Chapter Three: Roadway Alignment, Section 2.C and EXHIBIT 3.2, of this manual).
- **Superelevation – Intersections on Curved Alignment:** The superelevation rate for state highways at intersection with other public roads is desirably 4% or less. (See Chapter Four: Intersections, Driveways and Channelization, Section 1.C.3.b, of this manual).
- **Turf Transition:** NDOT prefers that an additional two feet of turf transition be provided beyond the minimum shoulder width (See EXHIBITS 6.1 THROUGH 6.6). This will maintain the minimum shoulder width after a future overlay surfacing grade raise. If this transition cannot be provided, **ADE** approval and a decision document in the project file is required. (See Chapter Six: The Typical Roadway Cross-Section, Section 2.A, of this manual).
- **Minimum Grades for Drainage – Superelevation Runout:** To facilitate pavement drainage, a minimum profile grade of 1.5% shall be maintained through the area where the adverse crown has been removed. A flatter grade, down to and including a grade of 0.5%, may be used with **Unit Head** approval. (See Chapter Three: Roadway Alignment, Section 2.C.1, of this manual).

- **Minimum Grades for Drainage – Urban Curbed Roadways:** A minimum grade of 0.35% is acceptable. Flatter grades, down to and including 0.20% may be used with **Unit Head** approval. (See Chapter Three: Roadway Alignment, Section 3.A.2, of this manual).
- **Vertical Alignment and Stopping Sight Distance:** The desirable K values should be used for all New and Reconstructed projects. The desirable K values provide intersection stopping sight distance for passenger cars for various conditions. If the desirable K values cannot be met, the vertical curve may be designed to any length down to and including stopping sight distance with **Unit Head** approval and a decision letter to the project file. For intersection conditions other than listed in the exhibits, intersections and driveways (except for field entrances) will be evaluated for intersection sight distance according to the procedures presented in Chapter 9 of the *Green Book*, “Intersection Sight Distance”. (See Chapter Three: Roadway Alignment, Sections 3.B.2, 3.C, and 3.D and EXHIBITS 3.9 AND 3.14 of this manual).
- **Loop Ramps:** The **NDOT** desirable loop radius is 250 feet; the minimum loop radius is 100 feet. (See Chapter Five: Interstates, Grade Separations, and Interchanges, Section 3.B, of this manual).
- **Spiral Transition Curves:** Spiral transition curves are preferred on Interstate ramps due to the higher percentage of truck traffic. (See Chapter Five: Interstates, Grade Separations, and Interchanges, Section 3.C, of this manual).
- **Intersection Sight Distance:** Intersections on New and Reconstructed projects should be designed for intersection sight distance for left-turns from a minor roadway based on a passenger car (Section 9.5.3.2.1, “Case B1 – Left-Turn from the Minor Roadway” in Chapter 9 of the *Green Book*): **ADE** approval is required if this condition cannot be met. (See Chapter Four: Intersections, Driveways and Channelization, Section 1.C.2, of this manual).
- **Intersection Skew:** When designing New and Reconstructed projects, a skew of 15° or less is preferred. Use of a skew angle greater than 15° requires **Unit Head** approval, with input from **Traffic Engineering**. Method A is used when there are excessive impacts on one side of the roadway, Method B is the preferred intersection realignment; Methods C and D should only be used under very low volume conditions or, if in urban areas, where a minimum distance is provided between the offset intersections. The final design of the realignment requires **Unit Head** approval. (See Chapter Four: Intersections, Driveways and Channelization, Section 1.C.3 and EXHIBIT 4.12 of this manual).
- **Offset Right-Turn Lanes:** **NDOT** prefers the use of the tapered offset right-turn lane. **ADE** approval is required to design a parallel offset right-turn lane. (See Chapter Four: Intersections, Driveways and Channelization, Section 1.D.3 and EXHIBIT 4.16 of this manual).
- **Grading:** Variations from the typical grading section will require the approval of the **ADE** and the reasons for the variation will be documented in the project file. (See Chapter Six: The Typical Roadway Cross-Section, Section 9.B and EXHIBITS 6.8, 6.9, 6.10 and 6.16 of this manual).
- **Vertical Clearance:** For new structures it is desirable to include a six-inch allowance in addition to the minimum clearance for future resurfacing. (See Chapter Ten: Miscellaneous Design Issues, Section 2.E.1, of this manual).

9. AASHTO MINIMUM DESIGN GUIDANCE

The guidance found in EXHIBITS 1.5 THROUGH 1.31 has been consolidated from the *Green Book* (Ref. 1.1), the *I-State Green Book* (Ref. 1.2), and the Roadside Design Guide (Ref. 1.7). Some items may be less restrictive than the guidance found in the *MDS* (Ref. 1.3). The designer may use the **AASHTO** design guidance for these items to avoid requesting a design exception and as a justification for using a lower design value when requesting a relaxation of the *MDS* (Ref. 1.3) (See Section 11 of this chapter).

Context

AASHTO has found it advisable to expand the traditional rural/municipal context definition to five contexts, based not only on location but also on development density, land uses, and building setbacks. The following definitions are from the *Green Book* (Ref. 1.1).

1. **Rural Context:** “The rural context applies to roads in rural areas that are not within a developed community. These include areas with the lowest development density; few houses or structures; widely dispersed or no residential, commercial, and industrial land uses; and usually large building setbacks. The rural context may include undeveloped land, farms, outdoor recreation areas, or low densities of other types of development. Most roads in rural areas fit the rural context and should be designed in a manner similar to past design criteria for rural facilities.”
2. **Rural Town Context:** “The rural town context applies to roads in rural areas located within developed communities. Rural towns generally have low development densities with diverse land uses, on-street parking, and sidewalks in some locations, and small building setbacks. Rural towns may include residential neighborhoods, schools, industrial facilities, and commercial main street business districts, each of which present differing design challenges and differing levels of pedestrian and bicycle activity. The rural town context recognizes that rural highways change character where they enter a small town, or other rural community, and that design should meet the needs of not only through travelers, but also the residents of the community. Speed expectations of through travelers change when they enter a rural town.”
3. **Suburban Context:** “The suburban context applies to roads and streets, typically within the outlying portions of urban areas, with low to medium development density, mixed land uses (with single-family residences, some multi-family residential structures, and nonresidential development including mixed town centers, commercial corridors, big box commercial stores, light industrial development). Building setbacks are varied with mostly off-street parking. The suburban context generally has lower development densities and drivers have higher speed expectations than the urban and urban core contexts. Pedestrians and bicyclist flows are higher than in the rural context, but may not be as high as found in urban and urban core areas.”

4. **Urban Context:** “The urban context has high-density development, mixed land uses, and prominent destinations. On-street parking and sidewalks are generally more common than in the suburban context, and building setbacks are mixed. Urban locations often include multi-story and low- to medium-rise structures for residential, commercial, and educational uses. Many structures accommodate mixed uses: commercial, residential, and parking. The urban context includes light industrial, and sometimes heavy industrial, land use. The urban context also includes prominent destinations with specialized structures for entertainment, including athletic and social events, as well as conference centers. In small- and medium-sized communities, the central business district may be more an urban context than an urban core context. Driver speed expectations are generally lower and pedestrian and bicyclist flows higher than in suburban areas. The density of transit routes is generally greater in the urban context than the suburban context, including in-street rail transit in larger communities and transit terminals in small- and medium-sized communities.”

5. **Urban Core Context:** “The urban core context includes areas of the highest density, with mixed land uses within and among predominantly high-rise structures, and with small building setbacks. The urban core context is found predominantly in the central business districts and adjoining portions of major metropolitan areas. On-street parking is often more limited and time restricted than in the urban context. Substantial parking is in multi-level structures attached to or integrated with other structures. The area is accessible to automobiles, commercial delivery vehicles, and public transit. Sidewalks are present nearly continuously, with pedestrian plazas and multi-level pedestrian bridges connecting commercial and parking structures in some locations. Transit corridors, including bus and rail transit, are typically common and major transit terminals may be present. Some government services are available, while other commercial uses predominate, including financial and legal services. Structures may have multiple uses and setbacks are not as generous as in the surrounding urban area. Residences are often apartments or condominiums. Driver speed expectations are low and pedestrian and bicycle flows are high.”

NEW AND RECONSTRUCTED RURAL STATE HIGHWAYS	
AASHTO CLASSIFICATION: INTERSTATE	
STATE FUNCTIONAL CLASSIFICATION: INTERSTATE	
NATIONAL FUNCTIONAL CLASSIFICATION: PRINCIPAL ARTERIAL – INTERSTATE	
Design Speed	70 mph
Lane Width	12 ft.
Shoulder Width	Right = 10 ft. 4-Lane (2 lanes in each direction): Left = 4 ft. Truck Traffic > 250 DDHV: Right = 12 ft. should be considered ≥ 6-Lane (≥ 3 lanes in each direction): Left = 10 ft. Truck Traffic > 250 DDHV: Right & Left = 12 ft. should be considered (Note: All shoulder widths are paved).
Horizontal Alignment	
Superelevation	$e_{max} = 8\%$
*Minimum Radius (Based on Maximum Superelevation)	1,810 ft.
Vertical Alignment	
*Crest K Value	247
*Sag K Value	181
*Maximum Grade	3% Level 4% Rolling
*Stopping Sight Distance	730 ft.
Cross Slope	
Lane	1.5% (A)
Shoulder	2% to 6% paved (B)
Lateral Offset to Obstruction	The nominal shoulder width.
Vertical Clearance (1)	Structure: 16 ft. Sign trusses and pedestrian/bicycle overpass: 17 ft.
Bridge Width	Full width of the approach roadway including paved shoulders. (D)
Structural Capacity	HL93

For additional information, see the *Green Book* (Ref. 1.1) and the *I-State Green Book* (Ref. 1.2)

* The minimum value is based on the design speed; see Exhibits 1.29, 1.30, and 1.31

- (1) Over the entire roadway width, including auxiliary lanes, shoulders, ramps, and collector-distributor roads.
- (A) On roadways where there are more than two lanes inclined in the same direction, the cross slope may be increased by 0.5% to 1% for each additional lane, up to a maximum of 3%.
- (B) The surfaced shoulder cross slope should not be less than the cross slope of the adjacent lane.
- (D) Long bridges (longer than 200 ft.) may have a lesser width and should be analyzed individually. On long bridges a reduced shoulder width of 4 ft. may be used on both the left and right sides.

Exhibit 1.5 AASHTO Minimum Design Guidance

AASHTO Classification: Rural Interstate

State Functional Classification: Rural Interstate

National Functional Classification: Rural Principal Arterial - Interstate

NEW AND RECONSTRUCTED RURAL STATE HIGHWAYS	
AASHTO CLASSIFICATION: RURAL FREEWAY	
STATE FUNCTIONAL CLASSIFICATION: EXPRESSWAY (ACCESS ONLY AT INTERCHANGES)	
NATIONAL FUNCTIONAL CLASSIFICATION: PRINCIPAL ARTERIAL – OTHER FREEWAYS AND EXPRESSWAYS	
Design Speed	50 mph
Lane Width	12 ft.
Shoulder Width	Right = 10 ft. 4-Lane (2 lanes in each direction): Left = 4 ft. Truck Traffic > 250 DDHV: Right = 12 ft. should be considered ≥ 6-Lane (≥ 3 lanes in each direction): Left = 10 ft. Truck Traffic > 250 DDHV: Right & Left = 12 ft. should be considered (Note: All shoulder widths are paved).
Horizontal Alignment	
Superelevation	$e_{max} = 8\%$
*Minimum Radius (Based on Maximum Superelevation)	758 ft.
Vertical Alignment	
*Crest K Value	84
*Sag K Value	96
*Maximum Grade	4% Level 5% Rolling
*Stopping Sight Distance	425 ft.
Cross Slope	
Lane	1.5% to 2% (A)
Shoulder	2% to 6% paved (C)
Lateral Offset to Obstruction	The nominal shoulder width.
Vertical Clearance (2)	Structure: 16 ft. Sign trusses and pedestrian/bicycle overpass: Structure clearance + 1 ft.
Bridge Width	Full width of the approach roadway. (E)
Structural Capacity	HL93

For additional information, see the *Green Book* (Ref. 1.1)

* The minimum value is based on the design speed; see Exhibits 1.29, 1.30, and 1.31

(2) Over the entire roadway width, including auxiliary lanes, shoulders, and collector-distributor roads.

(A) On roadways where there are more than two lanes inclined in the same direction, the cross slope may be increased by 0.5% to 1% for each additional lane, up to a maximum of 3%.

(C) The surfaced shoulder cross slope should not be less than the cross slope of the adjacent roadway lane and can be at least 1% greater.

(E) Bridges longer than 200 ft. may have a lesser width and should be analyzed individually.

Exhibit 1.6 AASHTO Minimum Design Guidance

AASHTO Classification: Rural Freeway

State Functional Classification: Rural Expressway (Access only at Interchanges)

National Functional Classification: Rural Principal Arterial – Other Freeways and Expressways

NEW AND RECONSTRUCTED RURAL STATE HIGHWAYS	
AASHTO CLASSIFICATION: RURAL DIVIDED ARTERIAL	
STATE FUNCTIONAL CLASSIFICATION: EXPRESSWAY	
NATIONAL FUNCTIONAL CLASSIFICATION: PRINCIPAL ARTERIAL	
Design Speed	50 mph
Lane Width	12 ft. (11 ft. may be retained based on alignment and crash history)
Shoulder Width	8 ft. Right usable (paved is preferred, 4 ft. min. paved if used for bicycles) 4 ft. Left (paved) ≥ 6 Lane (≥ 3 lanes in each direction): Left = 8 ft.
Horizontal Alignment	
Superelevation	$e_{max} = 8\%$
*Minimum Radius (Based on Maximum Superelevation)	758 ft.
Vertical Alignment	
*Crest K Value	84
*Sag K Value	96
*Maximum Grade (4)	4% Level 5% Rolling
*Stopping Sight Distance	425 ft.
Cross Slope	
Lane	1.5% to 2% (A)
Shoulder	2% to 6% paved (B) 6% to 8% turf
Lateral Offset to Obstruction	The greater of the shoulder width or 4 ft. from the edge of the travelled way.
Vertical Clearance (3)	Structure: 16 ft. (14 ft. may be retained if allowed by local statute). Sign trusses and pedestrian/bicycle overpass: Structure clearance +1 ft.
Bridge Width	Full width of the approach roadway including shoulders and pedestrian/bicycle facilities. Bridge L > 200 ft. without pedestrian facilities and with infrequent bicycle use: Shoulder width shall be at least 4 ft.
Structural Capacity	HL93

For additional information, see the *Green Book* (Ref. 1.1)

* The minimum value is based on the design speed; see Exhibits 1.29, 1.30, and 1.31

(3) Over the entire roadway width, including the usable width of the shoulders.

(4) Grade may be up to 1% steeper for tangent length less than 500 ft.

(A) On roadways where there are more than two lanes inclined in the same direction, the cross slope may be increased by 0.5% to 1% for each additional lane, up to a maximum of 3%.

(B) The surfaced shoulder cross slope should not be less than the cross slope of the adjacent lane.

Exhibit 1.7 AASHTO Minimum Design Guidance
AASHTO Classification: Rural Divided Arterial
State Functional Classification: Rural Expressway
National Functional Classification: Rural Principal Arterial

NEW AND RECONSTRUCTED RURAL STATE HIGHWAYS	
AASHTO CLASSIFICATION: RURAL TOWN DIVIDED ARTERIAL	
STATE FUNCTIONAL CLASSIFICATION: EXPRESSWAY	
NATIONAL FUNCTIONAL CLASSIFICATION: PRINCIPAL ARTERIAL	
Design Speed	20 mph
Lane Width	10 ft.
Shoulder Width	8 ft. Right usable (paved is preferred, 4 ft. min. paved if used for bicycles) 4 ft. Left (paved) ≥ 6 Lane (≥ 3 lanes in each direction): Left = 8 ft.
Horizontal Alignment	
Superelevation	$e_{max} = 8\%$
*Minimum Radius (Based on Maximum Superelevation)	76 ft.
Vertical Alignment	
*Crest K Value	7
*Sag K Value	17
*Maximum Grade (4)	5% Level 8% Rolling
*Stopping Sight Distance	115 ft.
Cross Slope	
Lane	1.5% to 2% (A)
Shoulder	2% to 6% paved (B) 6% to 8% turf
Lateral Offset to Obstruction	The greater of the shoulder width or 4 ft. from the edge of the travelled way.
Vertical Clearance (3)	Structure: 16 ft. (14 ft. may be retained if allowed by local statute). Sign trusses and pedestrian/bicycle overpass: Structure clearance +1 ft.
Bridge Width	Full width of the approach roadway including shoulders and pedestrian/bicycle facilities. Bridge L > 200 ft. without pedestrian facilities and with infrequent bicycle use: Shoulder width shall be at least 4 ft.
Structural Capacity	HL93

For additional information, see the *Green Book* (Ref. 1.1)

* The minimum value is based on the design speed; see Exhibits 1.29, 1.30, and 1.31

(3) Over the entire roadway width, including the usable width of shoulders.

(4) Grade may be up to 1% steeper for tangent length less than 500 ft.

(A) On roadways where there are more than two lanes inclined in the same direction, the cross slope may be increased by 0.5% to 1% for each additional lane, up to a maximum of 3%.

(B) The surfaced shoulder cross slope should not be less than the cross slope of the adjacent lane.

Exhibit 1.8 AASHTO Minimum Design Guidance
AASHTO Classification: Rural Town Divided Arterial
State Functional Classification: Rural Expressway
National Functional Classification: Rural Principal Arterial

NEW AND RECONSTRUCTED RURAL STATE HIGHWAYS	
AASHTO CLASSIFICATION: RURAL ARTERIAL	
STATE FUNCTIONAL CLASSIFICATION: MAJOR ARTERIAL	
NATIONAL FUNCTIONAL CLASSIFICATION: ARTERIAL	
Design Speed	50 mph
Lane Width	ADT > 2,000 VPD: 12 ft. (11 ft. may be retained based on alignment & crash history) ADT ≤ 2,000 VPD: 11 ft.
Shoulder Width	ADT > 2,000 VPD: 8 ft. usable (paved is preferred) ADT 400 – 2,000 VPD: 6 ft. usable (paved is preferred) ADT < 400 VPD: 4 ft. usable (paved is preferred) (All shoulders - 4 ft. minimum should be paved if used for bicycles, a minimum of 2 ft. may be paved if low volumes and no bicycle use)
Horizontal Alignment	
Superelevation	$e_{max} = 8\%$
*Minimum Radius (Based on Maximum Superelevation)	758 ft.
Vertical Alignment	
*Crest K Value	84
*Sag K Value	96
*Maximum Grade (4)	4% Level 5% Rolling
*Stopping Sight Distance	425 ft.
Cross Slope	
Lane	1.5% to 2% (A)
Shoulder	2% to 6% paved (B) 6% to 8% turf
Lateral Offset to Obstruction	The greater of the shoulder width or 4 ft. from the edge of the travelled way.
Vertical Clearance (3)	Structure: 16 ft. (14 ft. may be retained if allowed by local statute). Sign trusses and pedestrian/bicycle overpass: Structure clearance + 1 ft.
Bridge Width	Full width of the approach roadway including shoulders and pedestrian/bicycle facilities. Bridge L > 200 ft. without pedestrian facilities and with infrequent bicycle use: Shoulder width shall be at least 4 ft.
Structural Capacity	HL93

For additional information, see the *Green Book* (Ref. 1.1)

* The minimum value is based on the design speed; see Exhibits 1.29, 1.30, and 1.31

(3) Over the entire roadway width, including the usable width of shoulders.

(4) Grade may be up to 1% steeper for tangent length less than 500 ft.

(A) On roadways where there are more than two lanes inclined in the same direction, the cross slope may be increased by 0.5% to 1% for each additional lane, up to a maximum of 3%.

(B) The surfaced shoulder cross slope should not be less than the cross slope of the adjacent lane.

Exhibit 1.9 AASHTO Minimum Design Guidance
AASHTO Classification: Rural Arterial
State Functional Classification: Rural Major Arterial
National Functional Classification: Rural Arterial

NEW AND RECONSTRUCTED RURAL STATE HIGHWAYS	
AASHTO CLASSIFICATION: RURAL TOWN ARTERIAL	
STATE FUNCTIONAL CLASSIFICATION: MAJOR ARTERIAL	
NATIONAL FUNCTIONAL CLASSIFICATION: ARTERIAL	
Design Speed	20 mph
Lane Width	≤ 45 mph: 11 ft. ≥ 50 mph: 12 ft.
Shoulder Width	ADT > 2,000 VPD: 8 ft. usable (paved is preferred) ADT 400 – 2,000 VPD: 6 ft. usable (paved is preferred) ADT < 400 VPD: 4 ft. usable (paved is preferred) (All shoulders - 4 ft. minimum should be paved if used for bicycles, a minimum of 2 ft. may be paved if low volumes and no bicycle use)
Horizontal Alignment	
Superelevation	$e_{max} = 8\%$
*Minimum Radius (Based on Maximum Superelevation)	76 ft.
Vertical Alignment	
*Crest K Value	7
*Sag K Value	17
*Maximum Grade (4)	5% Level 8% Rolling
*Stopping Sight Distance	115 ft.
Cross Slope	
Lane	1.5% to 2% (A)
Shoulder	2% to 6% paved (B) 6% to 8% turf
Lateral Offset to Obstruction	The greater of the shoulder width or 4 ft. from the edge of the travelled way.
Vertical Clearance (3)	Structure: 16 ft. (14 ft. may be retained if allowed by local statute). Sign trusses and pedestrian/bicycle overpass: Structure clearance + 1 ft.
Bridge Width	Full width of the approach roadway including shoulders and pedestrian/bicycle facilities. Bridge L > 200 ft. without pedestrian facilities and with infrequent bicycle use: Shoulder width shall be at least 4 ft.
Structural Capacity	HL93

For additional information, see the *Green Book* (Ref. 1.1)

* The minimum value is based on the design speed; see Exhibits 1.29, 1.30, and 1.31

(3) Over the entire roadway width, including the usable width of shoulders.

(4) Grade may be up to 1% steeper for tangent length less than 500 ft.

(A) On roadways where there are more than two lanes inclined in the same direction, the cross slope may be increased by 0.5% to 1% for each additional lane, up to a maximum of 3%.

(B) The surfaced shoulder cross slope should not be less than the cross slope of the adjacent lane.

Exhibit 1.10 AASHTO Minimum Design Guidance

AASHTO Classification: Rural Town Arterial
State Functional Classification: Rural Major Arterial
National Functional Classification: Rural Arterial

NEW AND RECONSTRUCTED RURAL STATE HIGHWAYS			
AASHTO CLASSIFICATION: RURAL COLLECTOR			
STATE FUNCTIONAL CLASSIFICATION: MAJOR ARTERIAL			
NATIONAL FUNCTIONAL CLASSIFICATION: COLLECTOR/LOCAL			
	ADT > 2,000	ADT 400 – 2,000	ADT < 400
Design Speed	50 mph	40 mph	30 mph
Lane Width	11 ft. (6)	11 ft.	10 ft. (7)
Shoulder Width	6 ft.	4 ft.	2 ft.
Horizontal Alignment			
Superelevation	$e_{max} = 8\%$	$e_{max} = 8\%$	$e_{max} = 8\%$
*Minimum Radius (Based on Max. Superelevation)	758 ft.	444 ft.	214 ft.
Vertical Alignment			
*Crest K Value	84	44	19
*Sag K Value	96	64	37
*Maximum Grade	6% Level (4) 7% Rolling (4)	7% Level (5) 8% Rolling (5)	7% Level (5) 9% Rolling (5)
*Stopping Sight Distance	425 ft.	305 ft.	200 ft.
Cross Slope			
Lane	1.5% - 2%	1.5% - 2%	1.5% - 2%
Shoulder	2% - 6% paved (B) 6% - 8% turf	2% - 6% paved (B) 6% - 8% turf	2% - 6% paved (B) 6% - 8% turf
Lateral Offset to Obstruction	1.5 ft. from the edge of the travelled way (the greater of the shoulder width or 4 ft. is desirable).	1.5 ft. from the edge of the travelled way (the greater of the shoulder width or 4 ft. is desirable).	1.5 ft. from the edge of the travelled way (the greater of the shoulder width or 4 ft. is desirable).
Vertical Clearance (3)	Structure: 14 ft. Sign trusses and pedestrian/bicycle overpass: Structure clearance + 1 ft.	Structure: 14 ft. Sign trusses and pedestrian/bicycle overpass: Structure clearance + 1 ft.	Structure: 14 ft. Sign trusses and pedestrian/bicycle overpass: Structure clearance + 1 ft.
Bridge Width	Full width of the approach roadway plus surfaced shoulder width. Bridge L > 100 ft.: Traveled way + 3 ft. on each side.	Traveled way + 4 ft. on each side. Bridge L > 100 ft.: Traveled way + 3 ft. on each side.	Traveled way + 2 ft. on each side.
Structural Capacity	HL93	HL93	HL93

For additional information, see the *Green Book* (Ref. 1.1)

* The minimum value is based on the design speed; see Exhibits 1.29, 1.30, and 1.31

- (3) Over the entire roadway width with an additional allowance for future resurfacing.
- (4) Grade may be up to 1% steeper for tangent length less than 500 ft.
- (5) For an AADT less than 2,000 vehicles/day, the grade may be up to 2% steeper for tangent length less than 500 ft.
- (6) Consider 12 ft. lanes for design speed \geq 55 mph where substantial truck volumes are present or agricultural equipment frequently uses the road.
- (7) 9 ft. may be used for design speeds \leq 40 mph with ADTs < 250 veh/day.
- (B) The surfaced shoulder cross slope should not be less than the cross slope of the adjacent lane.

Exhibit 1.11 AASHTO Minimum Design Guidance

AASHTO Classification: Rural Collector
State Functional Classification: Rural Major Arterial
National Functional Classification: Rural Collector / Local

NEW AND RECONSTRUCTED RURAL STATE HIGHWAYS			
AASHTO CLASSIFICATION: RURAL TOWN COLLECTOR			
STATE FUNCTIONAL CLASSIFICATION: MAJOR ARTERIAL			
NATIONAL FUNCTIONAL CLASSIFICATION: COLLECTOR/LOCAL			
	ADT > 2,000	ADT 400 – 2,000	ADT < 400
Design Speed	45 mph	40 mph	30 mph
Lane Width	11 ft. (6)	11 ft.	10 ft. (7)
Shoulder Width	6 ft.	4 ft.	2 ft.
Horizontal Alignment			
Superelevation	$e_{max} = 8\%$	$e_{max} = 8\%$	$e_{max} = 8\%$
*Minimum Radius (Based on Max. Superelevation)	587 ft.	444 ft.	214 ft.
Vertical Alignment			
*Crest K Value	61	44	19
*Sag K Value	79	64	37
*Maximum Grade	7% Level (4) 8% Rolling (4)	7% Level (5) 8% Rolling (5)	7% Level (5) 9% Rolling (5)
*Stopping Sight Distance	360 ft.	305 ft.	200 ft.
Cross Slope			
Lane	1.5% - 2%	1.5% - 2%	1.5% - 2%
Shoulder	2% - 6% paved (B) 6% - 8% turf	2% - 6% paved (B) 6% - 8% turf	2% - 6% paved (B) 6% - 8% turf
Lateral Offset to Obstruction	1.5 ft. from the edge of the travelled way (the greater of the shoulder width or 4 ft. is desirable).	1.5 ft. from the edge of the travelled way (the greater of the shoulder width or 4 ft. is desirable).	1.5 ft. from the edge of the travelled way (the greater of the shoulder width or 4 ft. is desirable).
Vertical Clearance (3)	Structure: 14 ft. Sign trusses and pedestrian/bicycle overpass: Structure clearance + 1 ft.	Structure: 14 ft. Sign trusses and pedestrian/bicycle overpass: Structure clearance + 1 ft.	Structure: 14 ft. Sign trusses and pedestrian/bicycle overpass: Structure clearance + 1 ft.
Bridge Width	Full width of the approach roadway plus surfaced shoulder width. Bridge L > 100 ft.: Traveled way + 3 ft. on each side.	Traveled way + 4 ft. on each side. Bridge L > 100 ft.: Traveled way + 3 ft. on each side.	Traveled way + 2 ft. on each side.
Structural Capacity	HL93	HL93	HL93

For additional information, see the *Green Book* (Ref. 1.1)

* The minimum value is based on the design speed; see Exhibits 1.29, 1.30, and 1.31

- (3) Over the entire roadway width with an additional allowance for future resurfacing.
- (4) Grade may be up to 1% steeper for tangent length less than 500 ft.
- (5) For an AADT less than 2,000 vehicles/day, the grade may be up to 2% steeper for tangent length less than 500 ft.
- (6) Consider 12 ft. lanes for design speed ≥ 55 mph where substantial truck volumes are present or agricultural equipment frequently uses the road.
- (7) 9 ft. may be used for design speeds ≤ 40 mph with ADTs < 250 veh/day.
- (B) The surfaced shoulder cross slope should not be less than the cross slope of the adjacent lane.

Exhibit 1.12 AASHTO Minimum Design Guidance

AASHTO Classification: Rural Town Collector
State Functional Classification: Rural Major Arterial
National Functional Classification: Rural Collector / Local

NEW AND RECONSTRUCTED RURAL STATE HIGHWAYS		
AASHTO CLASSIFICATION: RECREATIONAL ROADS		
STATE FUNCTIONAL CLASSIFICATION: MAJOR ARTERIAL – SCENIC RECREATION		
NATIONAL FUNCTIONAL CLASSIFICATION: COLLECTOR/LOCAL		
	ADT ≥ 400	ADT < 400
Design Speed	40 mph	30 mph
Lane Width	11 ft.	10 ft.
Shoulder Width	2 ft.	2 ft.
Horizontal Alignment		
Superelevation	$e_{max} = 6\%$	$e_{max} = 6\%$
*Minimum Radius (Based on Max. Superelevation)	485 ft. (paved roadway)	231 ft. (paved roadway)
Vertical Alignment		
*Crest K Value	44	19
*Sag K Value	64	37
*Maximum Grade	7% Level 9% Rolling	7% Level 10% Rolling
*Stopping Sight Distance	305 ft.	200 ft.
Cross Slope		
Lane	1.5% - 2% paved 2% - 6% aggregate (3% desirable)	1.5% - 2% paved 2% - 6% aggregate (3% desirable)
Shoulder	2% - 6% paved (B) 4% - 6% aggregate 6% - 8% turf	2% - 6% paved (B) 4% - 6% aggregate 6% - 8% turf
Lateral Offset to Obstruction	The shoulder width.	The shoulder width.
Vertical Clearance (3)	Structure: 14 ft. Sign trusses and pedestrian/bicycle overpass: Structure clearance + 1 ft.	Structure: 14 ft. Sign trusses and pedestrian/bicycle overpass: Structure clearance + 1 ft.
Bridge Width	Traveled way + 3 ft. on each side.	Traveled way + 2 ft. on each side.
Structural Capacity	HL93	HL93

For additional information, see the *Green Book* (Ref. 1.1)

* The minimum value is based on the design speed; see 1.29, 1.30, and 1.31

(3) Over the entire roadway width with an additional allowance for future resurfacing.

(B) The surfaced shoulder cross slope should not be less than the cross slope of the adjacent lane.

Exhibit 1.13 AASHTO Minimum Design Guidance

AASHTO Classification: Recreational Roads
State Functional Classification: Rural Major Arterial – Scenic Recreation
National Functional Classification: Rural Collector / Local

NEW AND RECONSTRUCTED MUNICIPAL STATE HIGHWAYS	
AASHTO CLASSIFICATION: INTERSTATE	
STATE FUNCTIONAL CLASSIFICATION: INTERSTATE	
NATIONAL FUNCTIONAL CLASSIFICATION: PRINCIPAL ARTERIAL – INTERSTATE	
Design Speed	50 mph
Lane Width	12 ft.
Shoulder Width	Right = 10 ft. 4-Lane (2 lanes in each direction): Left = 4 ft. Truck Traffic > 250 DDHV: Right = 12 ft. should be considered ≥ 6-Lane (≥ 3 lanes in each direction): Left = 10 ft. Truck Traffic > 250 DDHV: Right & Left = 12 ft. should be considered (Note: All shoulder widths are paved).
Horizontal Alignment	
Superelevation	$e_{max} = 8\%$
*Minimum Radius (Based on Maximum Superelevation)	758 ft.
Vertical Alignment	
*Crest K Value	84
*Sag K Value	96
*Maximum Grade	4% Level 5% Rolling (Grades may be up to 1% steeper)
*Stopping Sight Distance	425 ft.
Cross Slope	
Lane	1.5% (A)
Shoulder	2% to 6% paved (B)
Lateral Offset to Obstruction	The nominal shoulder width.
Vertical Clearance (1)	Structure: 16 ft. for at least one route and 14 ft. for other routes. Sign trusses and pedestrian/bicycle overpass: Structure clearance + 1 ft.
Bridge Width	Full width of the approach roadway including paved shoulders. (D)
Structural Capacity	HL93

For additional information, see the *Green Book* (Ref. 1.1) and the *I-State Green Book* (Ref. 1.2)

(1) Over the entire roadway width, including auxiliary lanes, shoulders, ramps, and collector-distributor roads.

* The minimum value is based on the design speed; see Exhibits 1.29, 1.30, and 1.31

(A) On roadways where there are more than two lanes inclined in the same direction, the cross slope may be increased by 0.5% to 1% for each additional lane, up to a maximum of 3%.

(B) The surfaced shoulder cross slope should not be less than the cross slope of the adjacent lane.

(D) Long bridges (longer than 200 ft.) may have a lesser width and should be analyzed individually. On long bridges a reduced shoulder width of 4 ft. may be used on both the left and right sides.

Exhibit 1.14 AASHTO Minimum Design Guidance

AASHTO Classification: Urban Interstate

State Functional Classification: Municipal Interstate

National Functional Classification: Urban Principal Arterial - Interstate

NEW AND RECONSTRUCTED MUNICIPAL STATE HIGHWAYS	
AASHTO CLASSIFICATION: SUBURBAN FREEWAY	
STATE FUNCTIONAL CLASSIFICATION: EXPRESSWAY (ACCESS ONLY AT INTERCHANGES)	
NATIONAL FUNCTIONAL CLASSIFICATION: PRINCIPAL ARTERIAL – OTHER FREEWAYS AND EXPRESSWAYS	
Design Speed	50 mph
Lane Width	12 ft.
Shoulder Width	Right = 10 ft. 4-Lane (2 lanes in each direction): Left = 4 ft. Truck Traffic > 250 DDHV: Right = 12 ft. should be considered ≥ 6-Lane (≥ 3 lanes in each direction): Left = 10 ft. Truck Traffic > 250 DDHV: Right & Left = 12 ft. should be considered (Note: All shoulder widths are paved).
Horizontal Alignment	
Superelevation	$e_{max} = 8\%$
*Minimum Radius (Based on Maximum Superelevation)	758 ft.
Vertical Alignment	
*Crest K Value	84
*Sag K Value	96
*Maximum Grade	4% Level 5% Rolling (Grades 1% steeper may be provided)
*Stopping Sight Distance	425 ft.
Cross Slope	
Lane	1.5% to 2% (A)
Shoulder	2% to 6% paved (C)
Lateral Offset to Obstruction	The nominal shoulder width.
Vertical Clearance (2)	Structure: 16 ft. for at least one route and 14 ft. for other routes. Sign trusses and pedestrian/bicycle overpass: Structure clearance + 1 ft.
Bridge Width	Full width of the approach roadway. (E)
Structural Capacity	HL93

For additional information, see the *Green Book* (Ref. 1.1)

* The minimum value is based on the design speed; see Exhibits 1.29, 1.30, and 1.31

(2) Over the entire roadway width, including auxiliary lanes, shoulders, and collector-distributor roads.

(A) On roadways where there are more than two lanes inclined in the same direction, the cross slope may be increased by 0.5% to 1% for each additional lane, up to a maximum of 3%.

(C) The surfaced shoulder cross slope should not be less than the cross slope of the adjacent roadway lane and can be at least 1% greater.

(E) Bridges longer than 200 ft. may have a lesser width and should be analyzed individually.

Exhibit 1.15 AASHTO Minimum Design Guidance

AASHTO Classification: Suburban Freeway

State Functional Classification: Municipal Expressway (Access only at Interchanges)

National Functional Classification: Urban Principal Arterial – Other Freeways and Expressways

NEW AND RECONSTRUCTED MUNICIPAL STATE HIGHWAYS	
AASHTO CLASSIFICATION: URBAN FREEWAY	
STATE FUNCTIONAL CLASSIFICATION: EXPRESSWAY (ACCESS ONLY AT INTERCHANGES)	
NATIONAL FUNCTIONAL CLASSIFICATION: PRINCIPAL ARTERIAL – OTHER FREEWAYS AND EXPRESSWAYS	
Design Speed	50 mph
Lane Width	12 ft.
Shoulder Width	Right = 10 ft. 4-Lane (2 lanes in each direction): Left = 4 ft. Truck Traffic > 250 DDHV: Right & Left = 12 ft. should be considered ≥ 6-Lane (≥ 3 lanes in each direction): Left = 10 ft. Truck Traffic > 250 DDHV: Right & Left = 12 ft. should be considered (Note: All shoulder widths are paved).
Horizontal Alignment	
Superelevation	$e_{max} = 8\%$
*Minimum Radius (Based on Maximum Superelevation)	758 ft.
Vertical Alignment	
*Crest K Value	84
*Sag K Value	96
*Maximum Grade	4% Level 5% Rolling (Grades 1% steeper may be provided)
*Stopping Sight Distance	425 ft.
Cross Slope	
Lane	1.5% to 2% (A)
Shoulder	2% to 6% paved (C)
Lateral Offset to Obstruction	The nominal shoulder width.
Vertical Clearance (2)	Structure: 16 ft. for at least one route and 14 ft. for other routes. Sign trusses and pedestrian/bicycle overpass: Structure clearance + 1 ft.
Bridge Width	Full width of the approach roadway. (D)
Structural Capacity	HL93

For additional information, see the *Green Book* (Ref. 1.1)

* The minimum value is based on the design speed; see Exhibits 1.29, 1.30, and 1.31

(2) Over the entire roadway width, including auxiliary lanes, shoulders, and collector-distributor roads.

(A) On roadways where there are more than two lanes inclined in the same direction, the cross slope may be increased by 0.5% to 1% for each additional lane, up to a maximum of 3%.

(C) The surfaced shoulder cross slope should not be less than the cross slope of the adjacent roadway lane and can be at least 1% greater.

(D) Bridges longer than 200 ft. may have a lesser width and should be analyzed individually.

Exhibit 1.16 AASHTO Minimum Design Guidance

AASHTO Classification: Urban Freeway

State Functional Classification: Municipal Expressway (Access only at Interchanges)

National Functional Classification: Urban Principal Arterial – Other Freeways and Expressways

NEW AND RECONSTRUCTED MUNICIPAL STATE HIGHWAYS	
AASHTO CLASSIFICATION: URBAN CORE FREEWAY	
STATE FUNCTIONAL CLASSIFICATION: EXPRESSWAY (ACCESS ONLY AT INTERCHANGES)	
NATIONAL FUNCTIONAL CLASSIFICATION: PRINCIPAL ARTERIAL – OTHER FREEWAYS AND EXPRESSWAYS	
Design Speed	50 mph
Lane Width	12 ft.
Shoulder Width	Right = 10 ft. 4-Lane (2 lanes in each direction): Left = 4 ft. Truck Traffic > 250 DDHV: Right & Left = 12 ft. should be considered ≥ 6-Lane (≥ 3 lanes in each direction): Left = 10 ft. Truck Traffic > 250 DDHV: Right & Left = 12 ft. should be considered (Note: All shoulder widths are paved).
Horizontal Alignment	
Superelevation	$e_{max} = 8\%$
*Minimum Radius (Based on Maximum Superelevation)	758 ft.
Vertical Alignment	
*Crest K Value	84
*Sag K Value	96
*Maximum Grade	4% Level 5% Rolling (Grades 1% steeper may be provided)
*Stopping Sight Distance	425 ft.
Cross Slope	
Lane	1.5% to 2% (A)
Shoulder	2% to 6% paved (C)
Lateral Offset to Obstruction	The nominal shoulder width.
Vertical Clearance (2)	Structure: 16 ft. for at least one route and 14 ft. for other routes. Sign trusses and pedestrian/bicycle overpass: Structure clearance + 1 ft.
Bridge Width	Full width of the approach roadway. (D)
Structural Capacity	HL93

For additional information, see the *Green Book* (Ref. 1.1)

* The minimum value is based on the design speed; see Exhibits 1.29, 1.30, and 1.31

(2) Over the entire roadway width, including auxiliary lanes, shoulders, and collector-distributor roads.

(A) On roadways where there are more than two lanes inclined in the same direction, the cross slope may be increased by 0.5% to 1% for each additional lane, up to a maximum of 3%.

(C) The surfaced shoulder cross slope should not be less than the cross slope of the adjacent roadway lane and can be at least 1% greater.

(D) Bridges longer than 200 ft. may have a lesser width and should be analyzed individually.

Exhibit 1.17 AASHTO Minimum Design Guidance

AASHTO Classification: Urban Core Freeway

State Functional Classification: Municipal Expressway (Access only at Interchanges)

National Functional Classification: Urban Principal Arterial – Other Freeways and Expressways

NEW AND RECONSTRUCTED MUNICIPAL STATE HIGHWAYS	
AASHTO CLASSIFICATION: SUBURBAN ARTERIAL	
STATE FUNCTIONAL CLASSIFICATION: EXPRESSWAY	
NATIONAL FUNCTIONAL CLASSIFICATION: PRINCIPAL ARTERIAL – OTHER FREEWAYS AND EXPRESSWAYS	
Design Speed	30 mph
Lane Width	11 ft.
Shoulder Width	Curbed: Not Applicable 8 ft. Right usable (paved is preferred, 4 ft. min. paved if used for bicycles) 4 ft. Left (paved) ≥ 6 Lane (≥ 3 lanes in each direction): Left = 8 ft.
Horizontal Alignment	
Superelevation	$e_{max} = 8\%$
*Minimum Radius (Based on Maximum Superelevation)	214 ft.
Vertical Alignment	
*Crest K Value	19
*Sag K Value	37
*Maximum Grade (4)	7% Level 9% Rolling
*Stopping Sight Distance	200 ft.
Cross Slope	
Lane	1.5% to 3% (A)
Shoulder	2% to 6% paved (B) 6% to 8% turf
Lateral Offset to Obstruction	Curbed: 1.5 ft. from face of the curb (3 ft. at intersections). Non-curbed: The greater of the shoulder width or 4 ft. from the edge of the travelled way.
Vertical Clearance (3)	Structure: 16 ft. (14 ft. may be retained if allowed by local statute). Sign trusses and pedestrian/bicycle overpass: Structure clearance + 1 ft.
Bridge Width	Curbed: The curb to curb width of the street, including sidewalks, bike paths and bike lanes. Non-curbed: The full width of the approach roadway including shoulders and pedestrian/bicycle facilities. Bridge L > 200 ft.: Shoulder width should be at least 4 ft.
Structural Capacity	HL93

For additional information, see the *Green Book* (Ref. 1.1)

* The minimum value is based on the design speed; see Exhibits 1.29, 1.30, and 1.31

(3) Over the entire roadway width, including the usable width of shoulders.

(4) Grade may be up to 1% steeper for tangent lengths less than 500 ft.

(A) On roadways where there are more than two lanes inclined in the same direction, the cross slope may be increased by 0.5% to 1% for each additional lane, up to a maximum of 3%.

(B) The surfaced shoulder cross slope should not be less than the cross slope of the adjacent lane.

Exhibit 1.18 AASHTO Minimum Design Guidance

AASHTO Classification: Suburban Arterial

State Functional Classification: Municipal Expressway

National Functional Classification: Urban Principal Arterial – Other Freeways and Expressways

NEW AND RECONSTRUCTED MUNICIPAL STATE HIGHWAYS	
AASHTO CLASSIFICATION: URBAN ARTERIAL	
STATE FUNCTIONAL CLASSIFICATION: EXPRESSWAY	
NATIONAL FUNCTIONAL CLASSIFICATION: PRINCIPAL ARTERIAL – OTHER FREEWAYS AND EXPRESSWAYS	
Design Speed	25 mph
Lane Width	11 ft.
Shoulder Width	Curbed: Not Applicable 8 ft. Right usable (paved is preferred, 4 ft. min. paved if used for bicycles) 4 ft. Left (paved) ≥ 6 Lane (≥ 3 lanes in each direction): Left = 8 ft.
Horizontal Alignment	
Superelevation	$e_{max} = 8\%$
*Minimum Radius (Based on Maximum Superelevation)	134 ft.
Vertical Alignment	
*Crest K Value	12
*Sag K Value	26
*Maximum Grade (4)	7% Level 10% Rolling
*Stopping Sight Distance	155 ft.
Cross Slope	
Lane	1.5% to 3% (A)
Shoulder	2% to 6% paved (B) 6% to 8% turf
Lateral Offset to Obstruction	Curbed: 1.5 ft. from face of the curb (3 ft. at intersections). Non-curbed: The greater of the shoulder width or 4 ft. from the edge of the travelled way.
Vertical Clearance (3)	Structure: 16 ft. for one route & 14 ft. for other routes. Sign trusses and pedestrian/bicycle overpass: Structure clearance + 1 ft.
Bridge Width	Curbed: The curb to curb width of street, including sidewalks, bike paths and bike lanes. Non-curbed: The full width of the approach roadway including shoulders and pedestrian/bicycle facilities. Bridge L > 200 ft.: Shoulder width may be reduced to 4 ft.
Structural Capacity	HL93

For additional information, see the *Green Book* (Ref. 1.1)

* The minimum value is based on the design speed; see Exhibits 1.29, 1.30, and 1.31

(3) Over the entire roadway width, including the usable width of shoulders.

(4) Grade may be up to 1% steeper for tangent lengths less than 500 ft.

(A) On roadways where there are more than two lanes inclined in the same direction, the cross slope may be increased by 0.5% to 1% for each additional lane, up to a maximum of 3%.

(B) The surfaced shoulder cross slope should not be less than the cross slope of the adjacent lane.

Exhibit 1.19 AASHTO Minimum Design Guidance

AASHTO Classification: Urban Arterial

State Functional Classification: Municipal Expressway

National Functional Classification: Urban Principal Arterial – Other Freeways and Expressways

NEW AND RECONSTRUCTED MUNICIPAL STATE HIGHWAYS	
AASHTO CLASSIFICATION: URBAN CORE ARTERIAL	
STATE FUNCTIONAL CLASSIFICATION: EXPRESSWAY	
NATIONAL FUNCTIONAL CLASSIFICATION: PRINCIPAL ARTERIAL – OTHER FREEWAYS AND EXPRESSWAYS	
Design Speed	30 mph
Lane Width	10 ft.
Shoulder Width	Curbed: Not Applicable 8 ft. Right usable (paved is preferred, 4 ft. min. paved if used for bicycles) 4 ft. Left (paved) ≥ 6 Lane (≥ 3 lanes in each direction): Left = 8 ft.
Horizontal Alignment	
Superelevation	$e_{max} = 8\%$
*Minimum Radius (Based on Maximum Superelevation)	214 ft.
Vertical Alignment	
*Crest K Value	19
*Sag K Value	37
*Maximum Grade (4)	7% Level 9% Rolling
*Stopping Sight Distance	200 ft.
Cross Slope	
Lane	1.5% to 3% (A)
Shoulder	2% to 6% paved (B) 6% to 8% turf
Lateral Offset to Obstruction	Curbed: 1.5 ft. from face of the curb (3 ft. at intersections). Non-curbed: The greater of the shoulder width or 4 ft. from the edge of the travelled way.
Vertical Clearance (3)	Structure: 16 ft. for one route & 14 ft. for other routes. Sign trusses and pedestrian/bicycle overpass: Structure clearance + 1 ft.
Bridge Width	Curbed: The curb to curb width of street, including sidewalks, bike paths and bike lanes. Non-curbed: The full width of the approach roadway including shoulders and pedestrian/bicycle facilities. Bridge L > 200 ft.: Shoulder width may be reduced to 4 ft.
Structural Capacity	HL93

For additional information, see the *Green Book* (Ref. 1.1)

* The minimum value is based on the design speed; see Exhibits 1.29, 1.30, and 1.31

(3) Over the entire roadway width, including the usable width of shoulders.

(4) Grade may be up to 1% steeper for tangent lengths less than 500 ft.

(A) On roadways where there are more than two lanes inclined in the same direction, the cross slope may be increased by 0.5% to 1% for each additional lane, up to a maximum of 3%.

(B) The surfaced shoulder cross slope should not be less than the cross slope of the adjacent lane.

Exhibit 1.20 AASHTO Minimum Design Guidance

AASHTO Classification: Urban Core Arterial

State Functional Classification: Municipal Expressway

National Functional Classification: Urban Principal Arterial – Other Freeways and Expressways

NEW AND RECONSTRUCTED MUNICIPAL STATE HIGHWAYS	
AASHTO CLASSIFICATION: SUBURBAN ARTERIAL	
STATE FUNCTIONAL CLASSIFICATION: MAJOR ARTERIAL	
NATIONAL FUNCTIONAL CLASSIFICATION: ARTERIAL	
Design Speed	30 mph
Lane Width	11 ft.
Shoulder Width	Curbed: Not Applicable ADT > 2,000 VPD: 8 ft. usable (paved is preferred) ADT 400 – 2,000 VPD: 6 ft. usable (paved is preferred) ADT < 400 VPD: 4 ft. usable (paved is preferred) (All shoulders - 4 ft. minimum should be paved if used for bicycles, a minimum of 2 ft. may be paved if low volumes and no bicycle use)
Horizontal Alignment	
Superelevation	$e_{max} = 8\%$
*Minimum Radius (Based on Maximum Superelevation)	214 ft.
Vertical Alignment	
*Crest K Value	19
*Sag K Value	37
*Maximum Grade (4)	7% Level 9% Rolling
*Stopping Sight Distance	200 ft.
Cross Slope	
Lane	1.5% to 3% (A)
Shoulder	2% to 6% paved (B) 6% to 8% turf
Lateral Offset to Obstruction	Curbed: 1.5 ft. from face of the curb (3 ft. at intersections). Non-curbed: The greater of the shoulder width or 4 ft. from the edge of the travelled way.
Vertical Clearance (3)	Structure: 16 ft. (14 ft. may be retained if allowed by local statute). Sign trusses and pedestrian/bicycle overpass: Structure clearance + 1 ft.
Bridge Width	Curbed: The curb to curb width of street, including sidewalks, bike paths and bike lanes. Non-curbed: The full width of the approach roadway including shoulders and pedestrian/bicycle facilities. Bridge L > 200 ft.: Shoulder width should be at least 4 ft.
Structural Capacity	HL93

For additional information, see the *Green Book* (Ref. 1.1)

* The minimum value is based on the design speed; see Exhibits 1.29, 1.30, and 1.31

(3) Over the entire roadway width, including the usable width of shoulders.

(4) Grade may be up to 1% steeper for tangent lengths less than 500 ft.

(A) On roadways where there are more than two lanes inclined in the same direction, the cross slope may be increased by 0.5% to 1% for each additional lane, up to a maximum of 3%.

(B) The surfaced shoulder cross slope should not be less than the cross slope of the adjacent lane.

Exhibit 1.21 AASHTO Minimum Design Guidance
AASHTO Classification: Suburban Arterial
State Functional Classification: Municipal Major Arterial
National Functional Classification: Urban Arterial

NEW AND RECONSTRUCTED MUNICIPAL STATE HIGHWAYS	
AASHTO CLASSIFICATION: URBAN ARTERIAL	
STATE FUNCTIONAL CLASSIFICATION: MAJOR ARTERIAL	
NATIONAL FUNCTIONAL CLASSIFICATION: ARTERIAL	
Design Speed	25 mph
Lane Width	11 ft.
Shoulder Width	Curbed: Not Applicable ADT > 2,000 VPD: 8 ft. usable (paved is preferred) ADT 400 – 2,000 VPD: 6 ft. usable (paved is preferred) ADT < 400 VPD: 4 ft. usable (paved is preferred) (All shoulders - 4 ft. minimum should be paved if used for bicycles, a minimum of 2 ft. may be paved if low volumes and no bicycle use)
Horizontal Alignment	
Superelevation	$e_{max} = 8\%$
*Minimum Radius (Based on Maximum Superelevation)	134 ft.
Vertical Alignment	
*Crest K Value	12
*Sag K Value	26
*Maximum Grade (4)	7% Level 10% Rolling
*Stopping Sight Distance	155 ft.
Cross Slope	
Lane	1.5% to 3% (A)
Shoulder	2% to 6% paved (B) 6% to 8% turf
Lateral Offset to Obstruction	Curbed: 1.5 ft. from face of the curb (3 ft. at intersections). Non-curbed: The greater of the shoulder width or 4 ft. from the edge of the travelled way.
Vertical Clearance (3)	Structure: 16 ft. for one route & 14 ft. for other routes. Sign trusses and pedestrian/bicycle overpass: Structure clearance + 1 ft.
Bridge Width	Curbed: The curb to curb width of street, including sidewalks, bike paths and bike lanes. Non-curbed: The full width of the approach roadway including shoulders and pedestrian/bicycle facilities. Bridge L > 200 ft.: Shoulder width may be reduced to 4 ft.
Structural Capacity	HL93

For additional information, see the *Green Book* (Ref. 1.1)

* The minimum value is based on the design speed; see Exhibits 1.29, 1.30, and 1.31

(3) Over the entire roadway width, including the usable width of shoulders.

(4) Grade may be up to 1% steeper for tangent lengths less than 500 ft.

(A) On roadways where there are more than two lanes inclined in the same direction, the cross slope may be increased by 0.5% to 1% for each additional lane, up to a maximum of 3%.

(B) The surfaced shoulder cross slope should not be less than the cross slope of the adjacent lane.

Exhibit 1.22 AASHTO Minimum Design Guidance
AASHTO Classification: Urban Arterial
State Functional Classification: Municipal Major Arterial
National Functional Classification: Urban Arterial

NEW AND RECONSTRUCTED MUNICIPAL STATE HIGHWAYS	
AASHTO CLASSIFICATION: URBAN CORE ARTERIAL	
STATE FUNCTIONAL CLASSIFICATION: MAJOR ARTERIAL	
NATIONAL FUNCTIONAL CLASSIFICATION: ARTERIAL	
Design Speed	30 mph
Lane Width	10 ft.
Shoulder Width	Curbed: Not Applicable ADT > 2,000 VPD: 8 ft. usable (paved is preferred) ADT 400 – 2,000 VPD: 6 ft. usable (paved is preferred) ADT < 400 VPD: 4 ft. usable (paved is preferred) (All shoulders - 4 ft. minimum should be paved if used for bicycles, a minimum of 2 ft. may be paved if low volumes and no bicycle use)
Horizontal Alignment	
Superelevation	$e_{max} = 8\%$
*Minimum Radius (Based on Maximum Superelevation)	214 ft.
Vertical Alignment	
*Crest K Value	19
*Sag K Value	37
*Maximum Grade (4)	7% Level 9% Rolling
*Stopping Sight Distance	200 ft.
Cross Slope	
Lane	1.5% to 3% (A)
Shoulder	2% to 6% paved (B) 6% to 8% turf
Lateral Offset to Obstruction	Curbed: 1.5 ft. from face of the curb (3 ft. at intersections). Non-curbed: The greater of the shoulder width or 4 ft. from the edge of the travelled way.
Vertical Clearance (3)	Structure: 16 ft. for one route & 14 ft. for other routes. Sign trusses and pedestrian/bicycle overpass: Structure clearance + 1 ft.
Bridge Width	Curbed: The curb to curb width of street, including sidewalks, bike paths and bike lanes. Non-curbed: The full width of the approach roadway including shoulders and pedestrian/bicycle facilities. Bridge L > 200 ft.: Shoulder width may be reduced to 4 ft.
Structural Capacity	HL93

For additional information, see the *Green Book* (Ref. 1.1)

* The minimum value is based on the design speed; see Exhibits 1.29, 1.30, and 1.31

(3) Over the entire roadway width, including the usable width of shoulders.

(4) Grade may be up to 1% steeper for tangent lengths less than 500 ft.

(A) On roadways where there are more than two lanes inclined in the same direction, the cross slope may be increased by 0.5% to 1% for each additional lane, up to a maximum of 3%.

(B) The surfaced shoulder cross slope should not be less than the cross slope of the adjacent lane.

Exhibit 1.23 AASHTO Minimum Design Guidance
AASHTO Classification: Urban Core Arterial
State Functional Classification: Municipal Major Arterial
National Functional Classification: Urban Arterial

NEW AND RECONSTRUCTED MUNICIPAL STATE HIGHWAYS	
AASHTO CLASSIFICATION: SUBURBAN COLLECTOR	
STATE FUNCTIONAL CLASSIFICATION: MAJOR ARTERIAL	
NATIONAL FUNCTIONAL CLASSIFICATION: COLLECTOR	
Design Speed	35 mph
Lane Width	10 ft.
Shoulder Width	Curbed: Not Applicable ADT > 2,000 VPD: 6 ft. ADT 400 – 2,000 VPD: 4 ft. ADT < 400 VPD: 2 ft.
Horizontal Alignment	
Superelevation	$e_{max} = 8\%$
*Minimum Radius (Based on Maximum Superelevation)	314 ft.
Vertical Alignment	
*Crest K Value	29
*Sag K Value	49
*Maximum Grade (5)	7% Level 9% Rolling
*Stopping Sight Distance	250 ft.
Cross Slope	
Lane	1.5% to 3% (A)
Shoulder	2% to 6% paved (B) 6% to 8% turf
Lateral Offset to Obstruction	Curbed: 1.5 ft. from face of the curb (3 ft. at intersections). Non-curbed: The greater of the shoulder width or 4 ft. from the edge of the travelled way.
Vertical Clearance (3)	Structure: 14 ft. Sign trusses and pedestrian/bicycle overpass: Structure clearance + 1 ft.
Bridge Width	Curbed: The curb to curb width of the approach roadway. Non-curbed: The full width of the approach roadway, sidewalks on the approaches should be extended across the structure.
Structural Capacity	HL93

For additional information, see the *Green Book* (Ref. 1.1)

* The minimum value is based on the design speed; see Exhibits 1.29, 1.30, and 1.31

(3) Over the entire roadway width with additional allowance for resurfacing.

(5) For an AADT less than 2,000 vehicles/day, the grade may be up to 2% steeper for tangent length less than 500 ft.

(A) On roadways where there are more than two lanes inclined in the same direction, the cross slope may be increased by 0.5% to 1% for each additional lane, up to a maximum of 3%.

(B) The surfaced shoulder cross slope should not be less than the cross slope of the adjacent lane.

Exhibit 1.24 AASHTO Minimum Design Guidance
AASHTO Classification: Suburban Collector
State Functional Classification: Municipal Major Arterial
National Functional Classification: Urban Collector

NEW AND RECONSTRUCTED MUNICIPAL STATE HIGHWAYS	
AASHTO CLASSIFICATION: URBAN COLLECTOR	
STATE FUNCTIONAL CLASSIFICATION: MAJOR ARTERIAL	
NATIONAL FUNCTIONAL CLASSIFICATION: COLLECTOR	
Design Speed	30 mph
Lane Width	10 ft.
Shoulder Width	Curbed: Not Applicable ADT > 2,000 VPD: 6 ft. ADT 400 – 2,000 VPD: 4 ft. ADT < 400 VPD: 2 ft.
Horizontal Alignment	
Superelevation	$e_{max} = 6\%$
*Minimum Radius (Based on Maximum Superelevation)	231 ft.
Vertical Alignment	
*Crest K Value	19
*Sag K Value	37
*Maximum Grade (4)	9% Level 11% Rolling
*Stopping Sight Distance	200 ft.
Cross Slope	
Lane	1.5% to 3% (A)
Shoulder	2% to 6% paved (B) 6% to 8% turf
Lateral Offset to Obstruction	Curbed: 1.5 ft. from face of the curb (3 ft. at intersections). Non-curbed: The greater of the shoulder width or 4 ft. from the edge of the travelled way.
Vertical Clearance (3)	Structure: 14 ft. Sign trusses and pedestrian/bicycle overpass: Structure clearance + 1 ft.
Bridge Width	Curbed: The curb to curb width of the approach roadway. Non-curbed: The full width of the approach roadway, sidewalks on the approaches should be extended across the structure.
Structural Capacity	HL93

For additional information, see the *Green Book* (Ref. 1.1)

* The minimum value is based on the design speed; see Exhibits 1.29, 1.30, and 1.31

(3) Over the entire roadway width with additional allowance for resurfacing.

(4) Grade may be up to 1% steeper for tangent lengths less than 500 ft.

(A) On roadways where there are more than two lanes inclined in the same direction, the cross slope may be increased by 0.5% to 1% for each additional lane, up to a maximum of 3%.

(B) The surfaced shoulder cross slope should not be less than the cross slope of the adjacent lane.

Exhibit 1.25 AASHTO Minimum Design Guidance
AASHTO Classification: Urban Collector
State Functional Classification: Municipal Major Arterial
National Functional Classification: Urban Collector

NEW AND RECONSTRUCTED MUNICIPAL STATE HIGHWAYS	
AASHTO CLASSIFICATION: URBAN CORE COLLECTOR	
STATE FUNCTIONAL CLASSIFICATION: MAJOR ARTERIAL	
NATIONAL FUNCTIONAL CLASSIFICATION: COLLECTOR	
Design Speed	25 mph
Lane Width	10 ft.
Shoulder Width	Curbed: Not Applicable ADT > 2,000 VPD: 6 ft. ADT 400 – 2,000 VPD: 4 ft. ADT < 400 VPD: 2 ft.
Horizontal Alignment	
Superelevation	$e_{max} = 6\%$
*Minimum Radius (Based on Maximum Superelevation)	144 ft.
Vertical Alignment	
*Crest K Value	12
*Sag K Value	26
*Maximum Grade (4)	9% Level 12% Rolling
*Stopping Sight Distance	155 ft.
Cross Slope	
Lane	1.5% to 3% (A)
Shoulder	2% to 6% paved (B) 6% to 8% turf
Lateral Offset to Obstruction	Curbed: 1.5 ft. from face of the curb (3 ft. at intersections). Non-curbed: The greater of the shoulder width or 4 ft. from the edge of the travelled way.
Vertical Clearance (3)	Structure: 14 ft. Sign trusses and pedestrian/bicycle overpass: Structure clearance + 1 ft.
Bridge Width	Curbed: The curb to curb width of the approach roadway. Non-curbed: The full width of the approach roadway, sidewalks on the approaches should be extended across the structure.
Structural Capacity	HL93

For additional information, see the *Green Book* (Ref. 1.1)

* The minimum value is based on the design speed; see Exhibits 1.29, 1.30, and 1.31

(3) Over the entire roadway width with additional allowance for resurfacing.

(4) Grade may be up to 1% steeper for tangent lengths less than 500 ft.

(A) On roadways where there are more than two lanes inclined in the same direction, the cross slope may be increased by 0.5% to 1% for each additional lane, up to a maximum of 3%.

(B) The surfaced shoulder cross slope should not be less than the cross slope of the adjacent lane.

Exhibit 1.26 AASHTO Minimum Design Guidance
AASHTO Classification: Urban Core Collector
State Functional Classification: Municipal Major Arterial
National Functional Classification: Urban Collector


Design Speed (mph)	Design ADT	Foreslopes			Backslopes		
		1V:6H or flatter	1V:5H to 1V:4H	1V:3H	1V:3H	1V:5H to 1V:4H	1V:6H or flatter
≤ 40	UNDER 750 ^C	7 – 10	7 – 10	B	7 – 10	7 – 10	7 – 10
	750 – 1500	10 – 12	12 – 14	B	12 – 14	12 – 14	12 – 14
	1500 – 6000	12 – 14	14 – 16	B	14 – 16	14 – 16	14 – 16
	OVER 6000	14 – 16	16 – 18	B	16 – 18	16 – 18	16 – 18
45 – 50	UNDER 750 ^C	10 – 12	12 – 14	B	8 – 10	8 – 10	10 – 12
	750 – 1500	14 – 16	16 – 20	B	10 – 12	12 – 14	14 – 16
	1500 – 6000	16 – 18	20 – 26	B	12 – 14	14 – 16	16 – 18
	OVER 6000	20 – 22	24 – 28	B	14 – 16	18 – 20	20 – 22
55	UNDER 750 ^C	12 – 14	14 – 18	B	8 – 10	10 – 12	10 – 12
	750 – 1500	16 – 18	20 – 24	B	10 – 12	14 – 16	16 – 18
	1500 – 6000	20 – 22	24 – 30	B	14 – 16	16 – 18	20 – 22
	OVER 6000	22 – 24	26 – 32 ^A	B	16 – 18	20 – 22	22 – 24
60	UNDER 750 ^C	16 – 18	20 – 24	B	10 – 12	12 – 14	14 – 16
	750 – 1500	20 – 24	26 – 32 ^A	B	12 – 14	16 – 18	20 – 22
	1500 – 6000	26 – 30	32 – 40 ^A	B	14 – 18	18 – 22	24 – 26
	OVER 6000	30 – 32 ^A	36 – 44 ^A	B	20 – 22	24 – 26	26 – 28
65 – 70 ^D	UNDER 750 ^C	18 – 20	20 – 26	B	10 – 12	14 – 16	14 – 16
	750 – 1500	24 – 26	28 – 36 ^A	B	12 – 16	18 – 20	20 – 22
	1500 – 6000	28 – 32 ^A	34 – 42 ^A	B	16 – 20	22 – 24	26 – 28
	OVER 6000	30 – 34 ^A	38 – 46 ^A	B	22 – 24	26 – 30	28 – 30

Notes:

- A) When a site – specific investigation indicates a high probability of continuing crashes or when such occurrences are indicated by crash history, the designer may provide clear-zone distances greater than the clear zone shown in Exhibit 1.27. Clear zones may be limited to 30 ft. for practicality and to provide a consistent roadway template if previous experience with similar projects or designs indicates satisfactory performance.
- B) Because recovery is less likely on the unshielded, traversable 1V:3H fill slopes, fixed objects should not be present in the vicinity of the toe of these slopes. Recovery of high-speed vehicles that encroach beyond the edge of the shoulder may be expected to occur beyond the toe of slope. Determination of the width of the recovery area at the toe of slope should consider right-of-way availability, environmental concerns, economic factors, safety needs, and crash histories. Also, the distance between the edge of the through traveled lane and the beginning of the 1V:3H slope should influence the recovery area provided at the toe of slope. While the application may be limited by several factors, the foreslope parameters that may enter into determining a maximum desirable recovery area are illustrated in Exhibit 1.28. A 10-ft. recovery area at the toe of slope should be provided for all traversable, non-recoverable fill slopes.
- C) For roadways with low volumes it may not be practical to apply even the minimum values found in Exhibit 1.27. Refer to the Roadside Design Guide (Ref. 1.7), Chapter 12 for additional considerations for low-volume roadways and Chapter 10 for additional guidance for urban applications.
- D) When design speeds are greater than the values provided, the designer may provide clear-zone distances greater than those shown in Exhibit 1.27.

Exhibit 1.27 Suggested Clear-Zone Distances in Feet from Edge of Through Traveled Lane

Source: Roadside Design Guide (Ref. 1.7)

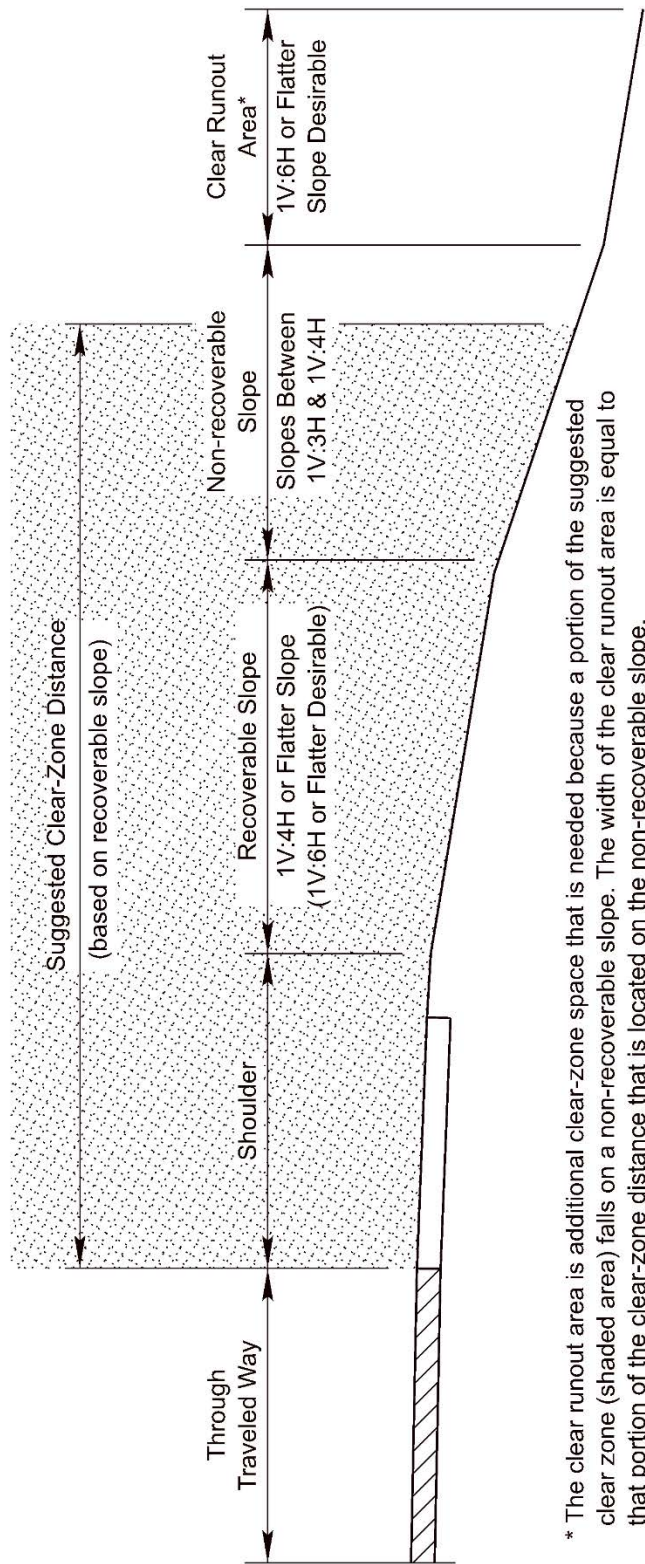

* The clear runout area is additional clear-zone space that is needed because a portion of the suggested clear zone (shaded area) falls on a non-recoverable slope. The width of the clear runout area is equal to that portion of the clear-zone distance that is located on the non-recoverable slope.

Exhibit 1.28 Clear Zone for Non-Recoverable Parallel Slope
 Source: Roadside Design Guide (Ref. 1.7)

DESIGN CRITERIA DEPENDENT ON SPEED – NEW AND RECONSTRUCTED PROJECTS														
CRITERIA	DESIGN SPEED (mph)													
	15	20	25	30	35	40	45	50	55	60	65	70	75	80
Minimum Radius														
Max. Super. 8%	38 ft.	76 ft.	134 ft.	214 ft.	314 ft.	444 ft.	587 ft.	758 ft.	960 ft.	1200 ft.	1480 ft.	1810 ft.	2210 ft.	2670 ft.
Max. Super. 6%	39 ft.	81 ft.	144 ft.	231 ft.	340 ft.	485 ft.	643 ft.	833 ft.	1060 ft.	1330 ft.	1660 ft.	2040 ft.	2500 ft.	3050 ft.
Max. Super. 4%	42 ft.	86 ft.	154 ft.	250 ft.	371 ft.	533 ft.	711 ft.	926 ft.	1190 ft.	1500 ft.	---	---	---	---
* Crest K Value	3	7	12	19	29	44	61	84	114	151	193	247	312	384
* Sag K Value	10	17	26	37	49	64	79	96	115	136	157	181	206	231
* Stopping Sight Distance	80 ft.	115 ft.	155 ft.	200 ft.	250 ft.	305 ft.	360 ft.	425 ft.	495 ft.	570 ft.	645 ft.	730 ft.	820 ft.	910 ft.

Source: American Association of State and Highway Transportation Officials, A Policy on Geometric Design of Highways and Streets (2018) Tables 3-7, 3-35, and 3-37.

* For **NDOT** desirable values see the Roadway Design Manual, Chapter Three: Roadway Alignment, **EXHIBITS 3.9 AND 3.14**. The use of less than the desirable value, down to and including the values given in this table, require **Roadway Design Unit Head** approval. The use of values less than those given in this table will require a Relaxation of the Nebraska Minimum Standards and, if required, a Design Exception from the **FHWA** (see Section 11, "Departure from Standards" of this chapter).

Exhibit 1.29 Design Criteria Dependent on Speed - New and Reconstructed Projects

AASHTO CLASSIFICATION/ STATE FUNCTIONAL CLASSIFICATION		MAXIMUM ALLOWABLE GRADES – NEW & RECONSTRUCTED RURAL PROJECTS													
		DESIGN SPEED (mph)													
TERRAIN		15	20	25	30	35	40	45	50	55	60	65	70	75	80
INTERSTATE/ INTERSTATE	Level	---	---	---	---	---	---	---	4%	4%	3%	3%	3%	3%	3%
	Rolling	---	---	---	---	---	---	---	5%	5%	4%	4%	4%	4%	4%
FREWAY/ EXPRESSWAY (ACCESS ONLY AT INTERCHANGES)	Level	---	---	---	---	---	---	---	4%	4%	3%	3%	3%	3%	3%
	Rolling	---	---	---	---	---	---	---	5%	5%	4%	4%	4%	4%	4%
RURAL DIVIDED ARTERIAL/ EXPRESSWAY (A)	Level	---	5%	5%	5%	5%	5%	5%	4%	4%	3%	3%	3%	3%	3%
	Rolling	---	8%	8%	7%	7%	6%	6%	5%	5%	4%	4%	4%	4%	4%
RURAL TOWN DIVIDED ARTERIAL/ EXPRESSWAY (A)	Level	---	5%	5%	5%	5%	5%	5%	4%	4%	3%	3%	3%	3%	3%
	Rolling	---	8%	8%	7%	7%	6%	6%	5%	5%	4%	4%	4%	4%	4%
RURAL ARTERIAL/ MAJOR ARTERIAL (A)	Level	---	5%	5%	5%	5%	5%	5%	4%	4%	3%	3%	3%	3%	3%
	Rolling	---	8%	8%	7%	7%	6%	6%	5%	5%	4%	4%	4%	4%	4%
RURAL TOWN ARTERIAL/ MAJOR ARTERIAL (A)	Level	---	5%	5%	5%	5%	5%	5%	4%	4%	3%	3%	3%	3%	3%
	Rolling	---	8%	8%	7%	7%	6%	6%	5%	5%	4%	4%	4%	4%	4%
RURAL COLLECTOR/ MAJOR ARTERIAL - COLLECTOR (B)	Level	---	7%	7%	7%	7%	7%	7%	6%	6%	5%	5%	5%	5%	5%
	Rolling	---	10%	10%	9%	9%	8%	8%	7%	7%	6%	6%	6%	6%	6%
RURAL TOWN COLLECTOR/ MAJOR ARTERIAL - COLLECTOR (B)	Level	---	7%	7%	7%	7%	7%	7%	6%	6%	5%	5%	5%	5%	5%
	Rolling	---	10%	10%	9%	9%	8%	8%	7%	7%	6%	6%	6%	6%	6%
RECREATIONAL ROADS/ MAJOR ARTERIAL - SCENIC RECREATION	Level	8%	8%	7%	7%	7%	7%	7%	7%	7%	6%	6%	6%	6%	6%
	Rolling	12%	11%	10%	10%	9%	9%	9%	8%	8%	7%	7%	7%	7%	7%

Sources: American Association of State and Highway Transportation Officials publications, A Policy on Geometric Design of Highways and Streets (2018) Tables 5-7, 6-2, 7-2, and 8-1 and A Policy on Design Standards Interstate System (May 2016) Table 2

(A) Grades may be up to 1% steeper for tangent lengths less than 500 feet.

(B) Grades may be up to 2% steeper for tangent lengths less than 500 feet.

Exhibit 1.30 Maximum Allowable Grades – New and Reconstructed Rural Projects

MAXIMUM ALLOWABLE GRADES – NEW & RECONSTRUCTED MUNICIPAL PROJECTS																	
ASHTO CLASSIFICATION/ STATE FUNCTIONAL CLASSIFICATION	TERRAIN	DESIGN SPEED (mph)															
		20	25	30	35	40	45	50	55	60	65	70	75	80			
INTERSTATE/ INTERSTATE (D)	Level	---	---	---	---	---	---	---	---	---	---	4%	4%	3%	3%	3%	3%
	Rolling	---	---	---	---	---	---	---	---	---	---	5%	5%	4%	4%	4%	4%
SUBURBAN FREEWAY/ EXPRESSWAY (ACCESS ONLY AT INTERCHANGES) (D)	Level	---	---	---	---	---	---	---	---	---	---	4%	4%	3%	3%	3%	3%
	Rolling	---	---	---	---	---	---	---	---	---	---	5%	5%	4%	4%	4%	4%
URBAN FREEWAY/ EXPRESSWAY (ACCESS ONLY AT INTERCHANGES) (D)	Level	---	---	---	---	---	---	---	---	---	---	4%	4%	3%	3%	3%	3%
	Rolling	---	---	---	---	---	---	---	---	---	---	5%	5%	4%	4%	4%	4%
URBAN CORE FREEWAY/ EXPRESSWAY (ACCESS ONLY AT INTERCHANGES) (D)	Level	---	---	---	---	---	---	---	---	---	---	4%	4%	3%	3%	3%	3%
	Rolling	---	---	---	---	---	---	---	---	---	---	5%	5%	4%	4%	4%	4%
URBAN CORE FREEWAY/ EXPRESSWAY (ACCESS ONLY AT INTERCHANGES) (D)	Level	---	---	---	---	---	---	---	---	---	---	4%	4%	3%	3%	3%	3%
	Rolling	---	---	---	---	---	---	---	---	---	---	5%	5%	4%	4%	4%	4%
SUBURBAN ARTERIAL/ EXPRESSWAY (A)	Level	8%	7%	7%	7%	7%	7%	7%	7%	7%	7%	6%	6%	5%	5%	5%	5%
	Rolling	10%	10%	9%	8%	8%	8%	8%	8%	8%	8%	7%	7%	6%	6%	6%	6%
URBAN ARTERIAL/ EXPRESSWAY (A)	Level	10%	10%	9%	8%	8%	8%	8%	8%	8%	8%	7%	7%	6%	6%	6%	6%
	Rolling	10%	10%	9%	8%	8%	8%	8%	8%	8%	8%	7%	7%	6%	6%	6%	6%
URBAN CORE ARTERIAL/ EXPRESSWAY (A)	Level	8%	7%	7%	7%	7%	7%	7%	7%	7%	7%	6%	6%	5%	5%	5%	5%
	Rolling	10%	10%	9%	8%	8%	8%	8%	8%	8%	8%	7%	7%	6%	6%	6%	6%
SUBURBAN ARTERIAL/ MAJOR ARTERIAL (A)	Level	8%	7%	7%	7%	7%	7%	7%	7%	7%	7%	6%	6%	5%	5%	5%	5%
	Rolling	10%	10%	9%	8%	8%	8%	8%	8%	8%	8%	7%	7%	6%	6%	6%	6%
URBAN ARTERIAL/ MAJOR ARTERIAL (A)	Level	8%	7%	7%	7%	7%	7%	7%	7%	7%	7%	6%	6%	5%	5%	5%	5%
	Rolling	10%	10%	9%	8%	8%	8%	8%	8%	8%	8%	7%	7%	6%	6%	6%	6%
URBAN CORE ARTERIAL/ MAJOR ARTERIAL (A)	Level	8%	7%	7%	7%	7%	7%	7%	7%	7%	7%	6%	6%	5%	5%	5%	5%
	Rolling	10%	10%	9%	8%	8%	8%	8%	8%	8%	8%	7%	7%	6%	6%	6%	6%
SUBURBAN COLLECTOR/ MAJOR ARTERIAL (B)	Level	7%	7%	7%	7%	7%	7%	7%	7%	7%	7%	6%	6%	5%	5%	5%	5%
	Rolling	10%	10%	9%	9%	9%	9%	9%	9%	9%	9%	8%	8%	7%	7%	7%	7%
URBAN COLLECTOR/MAJOR ARTERIAL (A)	Level	9%	9%	9%	9%	9%	9%	9%	9%	9%	9%	8%	8%	7%	7%	7%	7%
	Rolling	12%	12%	11%	10%	10%	10%	10%	10%	10%	10%	9%	9%	8%	8%	8%	8%
URBAN CORE COLLECTOR/ MAJOR ARTERIAL (A)	Level	9%	9%	9%	9%	9%	9%	9%	9%	9%	9%	8%	8%	7%	7%	7%	7%
	Rolling	12%	12%	11%	10%	10%	10%	10%	10%	10%	10%	9%	9%	8%	8%	8%	8%

Sources: American Association of State and Highway Transportation Officials publications, A Policy on Geometric Design of Highways and Streets (2018) Tables 6-2, 6-7, 7-4a, and 8-1 and A Policy on Design Standards Interstate System (May 2016) Table 2

- (A) Grades may be up to 1% steeper for tangent lengths less than 500 feet.
- (B) Grades may be up to 2% steeper for tangent lengths less than 500 feet.
- (D) Grades 1% steeper than the value shown may be used in urban areas.

Exhibit 1.31 Maximum Allowable Grades – New and Reconstructed Municipal Projects

10. NDOT FORM 76

NDOT Form 76, “Roadway Design – Principal Controlling Design Criteria”, shall be filled-out for every New, Reconstructed, or 3R project. The purpose of NDOT Form 76 is to highlight any design criteria used on the project which are less than the **AASHTO** minimum guidance (See Section 9 of this chapter) and/or the guidance in the *MDS* (Ref. 1.3). Such criteria will require a design exception and/or a relaxation of the *MDS* (See Section 11 of this chapter).

10.A Instructions For Completing NDOT Form 76

10.A.1 Sources

1. **Design Guidance from the *MDS***. The designer should use the *MDS* (Ref. 1.3) to obtain the minimum design values for all projects.
2. **AASHTO Minimum Design Guidance** (See Section 9 of this chapter). This guidance has been consolidated from the *Green Book* (Ref. 1.1), the *I-State Green Book* (Ref. 1.2), and the Roadside Design Guide (Ref. 1.7). Some items in the **AASHTO** minimum design guidance may be less restrictive than the guidance found in the *MDS*, the designer may use the **AASHTO** design guidance for these items to avoid requesting a design exception and as a justification for using a lower design value when requesting a relaxation of the *MDS*.
3. **NDOT Desirable Design Guidance** (See Section 8.C of this chapter). This listing gives the **NDOT** preferred guidance from the Nebraska Roadway Design Manual and from Roadway Design Division Policy Letters. These design values will be used on all projects, where practicable.

10.A.2 Instructions

NDOT Form 76 (See EXHIBIT 1.32) will be completed using the same format for all projects regardless of the level of approval authority.

Prior to filling out NDOT Form 76, the designer must determine whether the project is on the NHS and/or if it is a **FHWA** Risk Based Project (RBP) for Design. The designer should check Clarity[®] to determine if a project is a RBP for Design. The designer may view maps showing the NHS routes in Nebraska at:

https://www.fhwa.dot.gov/planning/national_highway_system/nhs_maps/nebraska/.

The designer, using the planning document as a guide and in consultation with the **Unit Head**, will determine the design values to be used on a project for each of the controlling design criteria (See Section 8 of this chapter). Placing a design value which is less than the minimum design value in NDOT Form 76 will require written **Unit Head** approval and justification to the project file. The applicable minimum design value will be entered in NDOT Form 76, in parenthesis, after the chosen design value. This will highlight any departure from the minimum design guidance requiring a design exception and/or a relaxation of the *MDS* (See Section 11 of this chapter).

Projects on the NHS: The designer may use the **AASHTO** minimum design values (See Section 9 of this chapter) but should use the design values from the *MDS* (Ref. 1.3) as the minimum condition. By exceeding or meeting the *MDS* values it will not be necessary to request either a design exception or a relaxation of the *MDS*.

Projects not on the NHS: The designer will use the design guidance from the *MDS* (Ref. 1.3) as the minimum condition. If the minimum design values cannot be attained, the designer will need to request a relaxation of the *MDS* (See Section 11.B of this chapter). RBPs for Design not on the NHS which fail to meet the minimum design values will require a design exception (See Section 11.A.2 of this chapter) in addition to a relaxation of the *MDS*.

Note: When entering the appropriate minimum values into NDOT Form 76, give the source of the guidance (See [EXHIBIT 1.32](#)). The designer will enter the following abbreviations on the form:

- “Minimum Design Standards” = (MDS)
- “AASHTO Minimum Design Guidance” = (GB)
- A Policy on Design Standards – Interstate System = (I-State)
- Roadside Design Guide = (RDG)

Expressway 3R Standards are currently found in Chapter Seventeen: Resurfacing, Restoration and Rehabilitation (3R) Projects, Section 1.E. The designer will use the (MDS) abbreviation on the NDOT Form 76.

For Interstate 3R projects, when using the **AASHTO** standards in effect at the time of the most recent New and Reconstructed project on the section of the Interstate, the following abbreviation will be used, including the year the standards were published:

- Interstate = (I-State, [year])

All projects: If the designer cannot meet the *MDS* value for a design criterion, the **AASHTO** design guidance in Section 9 of this chapter should be reviewed to see if that value may be used. The designer may use the **AASHTO** design guidance to avoid requesting a design exception and as a justification for using a lower design value when requesting a relaxation of the *MDS*.

When choosing the design values to be used on a project, the designer and **Unit Head** should refer to the “NDOT Desirable Design Guidance” (See Section 8.C of this chapter), the Roadway Design Manual, and the “Roadway Design Division Policy Letters” for additional guidance. Deviation from these guidelines will require approval from the appropriate **Roadway Design Division** level of authority.

The completed NDOT Form 76 is routed for signatures. After the signed NDOT Form 76 has been returned, design exceptions and/or relaxations of the *MDS* should be requested, if required (see Section 11 of this chapter). The signed NDOT Form 76 is circulated with the Plan-In-Hand Report and placed in the project file.

Roadway Design - Principal Controlling Design Criteria ⁽¹⁾

Project No:	Control No.:	Name:
Designer:	Unit Head:	
	Roadway	Roadway
Highway or Local Road/Street ⁽²⁾ <i>Sta. to Sta. (RP to RP)</i>		
On National Highway System?		
FHWA RBP for Design? ⁽³⁾		
State Functional Classification		
National Functional Classification		
On Priority Commercial System? ⁽⁴⁾		
ADT (Current/ Design Year) (VPD)		
Number of Lanes		
Project Type {New & Reconstructed/ 3R}		
Location (Rural/ Municipal)		
CRITERIA	DESIGN VALUE USED (MIN. DESIGN VALUE)	DESIGN VALUE USED (MIN. DESIGN VALUE)
Design Speed (mph)		
Lane Width (ft.)		
Shoulder Width (Total/Surf.-Rt./Lt.) (ft.)		
Horizontal Alignment		
Superelevation (Maximum e) (%)		
Minimum Curve Radius (ft.)		
Vertical Alignment		
Crest K Value (Minimum)		
Sag K Value (Minimum)		
Maximum Grade (%)		
Stopping Sight Distance (Min.) (ft.)		
Cross Slope (%)		
Lane		
Shoulder		
Horizontal Clear Zone or Fixed Obstacle Clearance (ft.)		
Lateral Offset to Obstruction (ft.)		
Vertical Clearance (ft.) ⁽⁵⁾		
Structures		
Sign Trusses and Pedestrian/ Bicycle Overpasses		
Clear Bridge Width (Face of Rail to Face of Rail) (New & Reconstructed/ 3R) (ft.)		
Structural Capacity (Bridge Design Loading)		

(1) For additional information, see the Roadway Design Manual, Chapter One: Roadway Design Standards, Section 8.

(<http://dot.nebraska.gov/business-center/design-consultant/rd-manuals/>)

(2) "Highway or Local Road/Street" is project-specific, roads may be listed individually or grouped together (e.g. mainline, ramps, county roads, arterials) if they have common design criteria.

(3) Risk Based Project. See the Roadway Design Manual, Chapter One: Roadway Design Standards, Section 11.A

(4) For additional information, see the Roadway Design Manual, Chapter Six: The Typical Roadway Cross-Section, Section 2.A.1

(5) See the Roadway Design Manual, Chapter Ten: Miscellaneous Design Issues, Exhibit 10.4

MDS = Minimum Design Standards

GB = "AASHTO Minimum Design Guidance"

I-State [year] = A Policy on Design Standards – Interstate System

RDG = Roadside Design Guide

THIS PROJECT WILL REQUIRE A DESIGN EXCEPTION

YES NO

THIS PROJECT WILL REQUIRE A RELAXATION OF THE MINIMUM DESIGN STANDARDS

YES NO

11. DEPARTURE FROM STANDARDS

The **AASHTO** minimum design guidance is presented in the *Green Book* (Ref. 1.1), the *I-State Green Book* (Ref. 1.2), and the Roadside Design Guide (Ref. 1.7). This guidance is consolidated in Section 9 of this chapter. If the **AASHTO** minimum design guidance cannot be attained for one or more of the controlling design criteria for a project on the NHS, a design exception will be required. A design exception will also be required if the design guidance in the *MDS* (Ref. 1.3) cannot be attained for one or more of the controlling design criteria for a **FHWA** Risk Based Project (RBP for Design) which is not on the NHS. Documentation for the design exception will be included in the project file, as detailed in Section 11.A.2 of this chapter.

If the design standards in the *MDS* (Ref. 1.3) cannot be attained for one or more of the controlling design criteria for any project, a relaxation of the *MDS* will be required, as detailed in Section 11.B of this chapter, unless the project is classified as a Maintenance project. Documentation for the design relaxation will be included in the project file.

Design exceptions and/or relaxations of the *MDS* should be requested after the return of a signed NDOT Form 76 (see Section 10 of this chapter).

11.A Design Exceptions for Projects on the NHS and for Risk Based Projects

11.A.1 Oversight Authority for Departure from Standards

FHWA PROJECT APPROVAL AUTHORITY: **FHWA** retains full oversight and approval authority for design exceptions to the controlling design criteria for any project on the NHS which has been designated as a RBP for Design.

The designer should check Clarity[®] to determine if a project is a RBP for Design.

NDOT PROJECT APPROVAL AUTHORITY: Under the terms of the NDOT/FHWA Stewardship & Oversight Agreement (Ref. 1.6) ([fhwa-ndot-stewardship-agreement.pdf \(nebraska.gov\)](https://www.fhwa-dot.gov/design/standards/qa.cfm)), **NDOT** assumes oversight and approval authority for design exceptions to the controlling design criteria for any project on the NHS which is not designated as a RBP for Design and for any project designated as a RBP for Design which is not on the NHS.

11.A.2 Design Exception Documentation for RBPs for Design

RBPs for Design which are on the NHS: For RBPs for Design on the NHS that do not meet the **AASHTO** minimum design guidance (See Section 9 of this chapter), a design exception document (See EXHIBIT 1.33) will be prepared for **FHWA** approval (See “Guidance on NHS Design Standards and Design Exceptions”, <https://www.fhwa.dot.gov/design/standards/qa.cfm>). If the project does not meet the design standards found in the *MDS* (Ref. 1.3), the designer will also request a relaxation of the *MDS*, as detailed in Section 11.B of this chapter, **before** obtaining **FHWA** approval.

RBPs for Design which are not on the NHS: For RBPs for Design which are not on the NHS and do not meet the guidance found in the *MDS* (Ref. 1.3), a request for relaxation of the *MDS* will be prepared, as detailed in Section 11.B of this chapter, for both the project file and for approval by the **NDOT Deputy Director - Engineering**. This documentation does not require **FHWA** approval but will be transmitted to the appropriate **FHWA Transportation Engineer**.

Projects on the NHS which are not RBPs for Design: For projects on the NHS that do not meet the **AASHTO** minimum design guidance (See Section 9 of this chapter), a design exception document will be prepared for both the project file and for approval by the **NDOT Deputy Director - Engineering**. This documentation will not be submitted to the **FHWA** for approval but will be transmitted to the appropriate **FHWA Transportation Engineer**. The designer will also request a relaxation of the *MDS* as detailed in Section 11.B of this chapter.

Projects meeting the minimum standards: The Plan-in-Hand Report will note those projects that meet the minimum design standards.

11.B Design Relaxations of the *MDS*

A request for a design relaxation letter will follow the **FHWA** memo “Guidance on NHS Design Standards and Design Exceptions” (<https://www.fhwa.dot.gov/design/standards/qa.cfm>) and will contain the following information:

- Specific design criteria that will not be met
- Existing roadway characteristics
- Alternatives considered
- Comparison of the safety and operational performance of the roadway and other impacts such as right-of-way, community, environmental, cost, and usability by all modes of transportation
- Proposed mitigation measures
- Compatibility with adjacent sections of roadway

“Design Speed” and “Design Loading Structural Capacity” are fundamental criteria in the design of a project and additional documentation is required for relaxations of these criteria. “Design Speed” relaxations should describe the length of the proposed section with a lower design speed compared to the overall length of the project and the measures that will be used in transitioning to adjacent sections with a different design speed. Documentation for relaxations of the “Design Loading Structural Capacity” should include verification of safe load-carrying capacity (load rating) for all State unrestricted legal loads or routine permit loads and, in the case of bridges and tunnels on the Interstate System, all Federal legal loads.

The request for relaxation of the *MDS* will be routed through the **NDOT Division Head** and will then be transmitted to the **NDOT Deputy Director-Engineering** for approval. After approval, the request will be sent to the **Secretary of the Board of Public Roads Classifications and Standards** at least ten working days prior to the board meeting at which it will be presented to the **Board of Public Roads Classifications and Standards** for their approval.

The request for a relaxation of the *MDS* will be presented to the **Board of Public Roads Classifications and Standards** in a power point format. The power point presentation will include location maps, aerial views and pictures of the location(s) of the relaxation, typical sections (existing, proposed, and standard), slides concerning crashes (not including protected information), costs to obtain standards, environmental impacts, etc. The designer or the **Unit Head** will schedule a meeting at least two weeks in advance of the board meeting to present the power point to the **NDOT Roadway Design Engineer**.

11.C Procedure for When Desirable Conditions Cannot be Attained

In those instances where it is not possible to meet the desirable design condition (See Section 8.C of this chapter), a decision document will be created (See [EXHIBIT 1.34](#)). The Design Decision Documentation Sheet, NDOT Form 335, may be used for this purpose. This document should be coordinated with the appropriate **NDOT Divisions** (e.g. **DE, Project Development, Traffic Engineering**) and by the appropriate level of supervision (such as the **Unit Head** or the **ADE**) and placed in the project file. For example: where it is not possible to design a temporary roadway to a design speed 10 mph less than the existing posted speed limit, the designer will detail the reasons why a lower design speed is necessary, obtain approval from the **Unit Head**, and coordinate with **Traffic Engineering**.



Pete Ricketts, Governor

December 1, 2017

Mr. Joseph Werning
Nebraska Federal Highway Administration
100 Centennial Mall Room 220
Lincoln, NE 68509-3803

Re: Project No. S-680-9(35)
C.N. 22632
Mormon Bridges
Design Exception Request

Dear Mr. Werning

Pursuant to the Code of Federal Regulations (CFR) 625.3(f), exceptions may be approved on a project basis for designs that do not conform to the minimum or limiting criteria set forth in the standards, policies, and standard specifications adopted in 23 CFR 625. FHWA identified 10 Controlling Criteria as having substantial importance to the operational and safety performance of any highway. The Nebraska Department of Transportation (NDOT) is requesting an exception for two of these criteria, shoulder width and vertical clearance. NDOT is requesting the existing one foot inside and outside shoulder width and 15.69 foot vertical clearance for the I-680 eastbound bridge over the Missouri River at reference post (RP) 13.43 to remain in place.

NDOT is developing plans to make 3R improvements to the Mormon Bridges on I-680 over the Missouri River at Reference Post 13.43 between Douglas County, Nebraska and Pottawattamie County, Iowa. The Nebraska Board of Public Roads Classifications and Standards approved the relaxation of standards on October 20, 2017 (see attached request letter and approval letter).

NDOT will engage in mitigation strategies to address the shoulder width and vertical clearance design exception of the eastbound structure. These strategies include providing a "Low Clearance" sign in advance of the structure and a "Bridge Clearance 15'-6"" sign at the first eastbound truss. The bridge width will be mitigated with delineators and object markers on the guardrail approaches to the eastbound bridge.

After evaluation, NDOT staff has concluded it is in the public's interest to make 3R improvements to the existing I-680 eastbound Mormon Bridge. We request FHWA to approve this exception to the Minimum Design Standards for Shoulder Width and Vertical Clearance.

Sincerely,

Mike Owen, P.E.,
Roadway Design Engineer

Attachment: Location Map

Request letter to Nebraska Board of Public Roads Classifications and Standards
Excerpt from 10/20/17 Nebraska Board of Public Roads Classifications and Standards

FHWA Concurrence _____

Date _____

Department of Transportation

1500 Highway 2
PO Box 94759
Lincoln, NE 68509-4759

OFFICE 402-471-4567 FAX 402-479-4325
NDOT.ContactUs@nebraska.gov

dot.nebraska.gov

12. REFERENCES

- 1.1 American Association of State Highway and Transportation Officials, A Policy on Geometric Design of Highways and Streets (*Green Book*), Washington, D.C., 2018.
- 1.2 American Association of State Highway and Transportation Officials, A Policy on Design Standards Interstate System (*I-State Green Book*), Washington, D.C., 2016.
- 1.3 Board of Public Roads Classifications and Standards, Nebraska Minimum Design Standards (*MDS*), Current Edition. ([nac-428-rules-regs-nbcs.pdf](#))
- 1.4 Federal Highway Administration, Highway Functional Classification Concepts, Criteria and Procedures, U.S. Department of Transportation, FHWA, Washington, D.C., 2023. (<https://www.fhwa.dot.gov/planning/processes/statewide/related/hwy-functional-classification-2023.pdf>)
- 1.5 Reissue Revised Statutes of Nebraska, Laws Applicable to the Nebraska Department of Transportation (Containing Chapter 3, Aeronautics; Chapter 39, Highways and Bridges; Chapter 49, Laws, Article 8, Definitions, Construction, and Citation; Chapter 60, Motor Vehicles, Article 6, Nebraska Rules of the Road; and Chapter 81, Article 7, Department of Transportation), July 2017 ([Nebraska Legislature - Browse Statutes by Chapter](#))
- 1.6 Nebraska Department of Transportation, NDOR/FHWA Stewardship & Oversight Agreement, August 2023 ([fhwa-ndot-stewardship-agreement.pdf \(nebraska.gov\)](#))
- 1.7 American Association of State Highway and Transportation Officials, Roadside Design Guide, Washington, D.C., 2011.
- 1.8 Title 23 of the Code of Federal Regulations (*23 CFR*) ([eCFR :: Title 23 of the CFR -- Highways](#))
- 1.9 Federal Highway Administration, Bridge Preservation Guide, U.S. Department of Transportation, FHWA, Washington, D.C., Spring 2018. ([FHWA Bridge Preservation Guide](#))

